

Installation Manual


eCoolPark 1.0 12V – Ford Explorer

Developed by: Bergstrom Inc.

Updated 2/28/2023



Bergstrom®

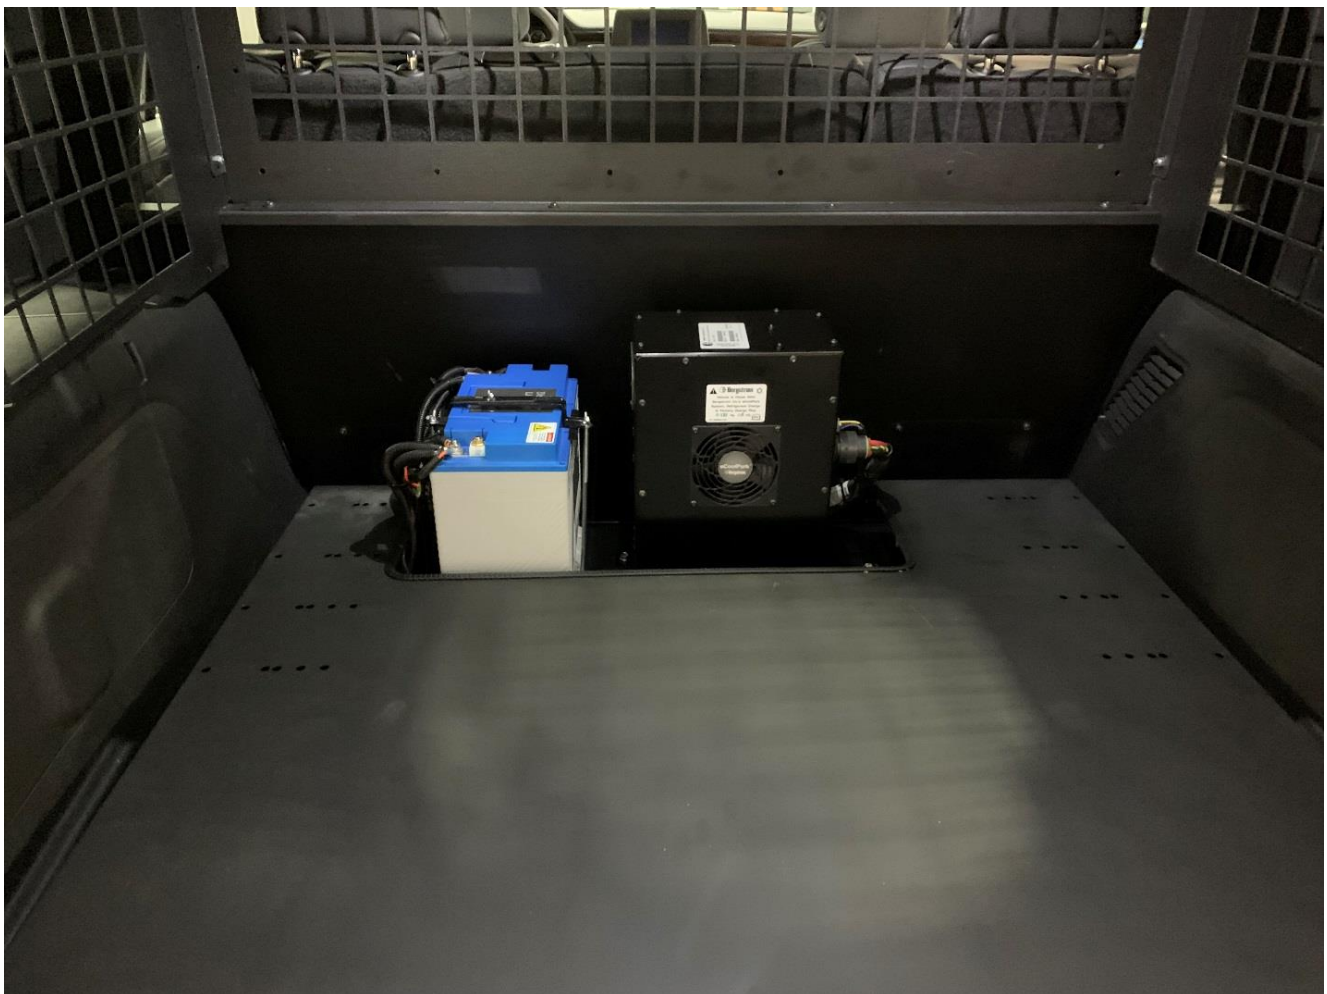

The information contained herein is proprietary to Bergstrom Inc and/or its subsidiaries shall not be reproduced, copied, or disclosed in whole or in part, or used for manufacture or any other purpose, without prior written permission of Bergstrom Inc. The only controlled version is that viewed electronically on the designated Bergstrom intranet site.

Table of Contents

Introduction.....	0-3
Before You Start.....	0-5
Parts List.....	0-9
Tools List.....	0-12
Installation Procedures.....	1-1
Overview.....	1-2
Disconnect Power Source and Reclaim OEM Refrigerant.....	1-3
Prepare and Loose Fit eCoolPark Unit.....	1-4
Run Hoses (loose).....	1-5
Identify OEM Refrigerant Tubing/Hoses and Install T Fittings...	1-6
Fitting Assembly.....	1-7
Connect to Hoses.....	1-10
Secure Hoses and Connect to Unit.....	1-12
Leak Check and Charge System.....	1-14
Checking for a Leak.....	1-15
Electrical Installation.....	2-1
Operating Instructions.....	3-1
Troubleshooting.....	4-1
Appendix.....	5-1

Congratulations!

You have chosen the premier no-idle climate control system on the market today – the *eCoolPark 1.0* from Bergstrom Inc.



The *eCoolPark 1.0* is a powerful 12 VDC system that keeps the cab compartment cool in hot weather without having to idle the vehicle engine. This system is intended to provide no-idle cooling for the cab. The system consists of an electrified compressor unit installed in the trunk of the vehicle. The system integrates into the existing A/C hoses/tubes and utilizes the existing evaporator and condenser. Check valves are used to isolate the eCoolPark system from the OEM refrigeration system. It not only dramatically reduces fuel burned, but is also extremely environmentally friendly.



The eCoolPark unit must remain upright at all times. The refrigerant inlet/outlet at the bottom of the unit should be capped at all times.

This specific set of instructions is intended for use only on a Ford Explorer. For another vehicle's instructions or for a universal set, contact a Bergstrom employee or visit:

<https://us.bergstrominc.com/nite-manuals-support/>

A typical installation of the eCoolPark 1.0 system takes between 6 and 10 hours. This manual contains step-by-step installation instructions and is divided into three main sections:

- **Installation Procedures**
- **Electrical Installation**
- **Operating Instructions**

If relocation or reinstallation of any pre-installed equipment is necessary, please refer to the components manufacturer's instructions or safety guidelines for proper installation.

Before starting, we recommend the following to help in the installation process:

1. Lay out all parts check to make sure everything is included. You may have extra hardware after the installation is complete. If you are missing any parts, call 1-866-204-8570.
2. Please keep the compressor unit in an upright position at all times to prevent damage. If unit has been tipped, place upright for 6 hours prior to running.
3. Be sure you have all the required tools by consulting the "Tools Required" tab.
4. Read through the installation manual before beginning to understand the order of installation.
5. Make sure all workers have proper lighting throughout the install.
6. Make sure to wear proper safety equipment at all times.



Precautions

Installation, service, and repair of these units should be solicited only by trained service technicians who are acquainted with standard service instructions and training material.

All equipment should be installed in accordance with accepted principles and unit installation instructions. Extreme caution should be observed when troubleshooting electrical components. These messages are for your protection and information. Failure to follow these alerted messages may cause bodily injuries to yourself and/or others as well as damages to the specified unit.

Health, Safety, and Environmental Policy

Under any condition Bergstrom Inc. is committed to protecting the health and safety of all working individuals at or visiting our site. We strategize, administer, conduct, and supervise our efforts in agreement with best practice. Hence, we want to ensure all workers have a clear understanding of their accountabilities with that of the company.

Environmental Concerns

Public awareness of and education about the benefits of using green technologies, coupled with energy efficiency, has created renewed interest within the HVAC industry.

When refrigerant is discarded attempt to reclaim and recycle it. To preserve our environment, follow appropriate rules and regulations when disposing of any resources. It is under our obligation to put in place a series of practices and procedures that, when taken together, result in an environmental management system.

Disclaimer of Liability

Descriptions and specifications within this manual were in effect at the time of production. Models and specifications are subject to change.

Picture Symbols

Observe all warning and caution notices posted on equipment and in instructions and/or manuals. Pay special attention to directives prefixed by symbols and signals indicated as “Warning”, “Caution”, and “Note”.

Do not disregard any of these alerts

Warning

This picture symbol with the remark “Warning” refers to the risk of imminent danger and can be vital to one’s health. The message will convey what the hazards are, consequences of those hazards, and/or how to avoid such injury. Under certain circumstances, failure to comply with these instructions can cause severe or life-threatening impairment.

Caution

This picture symbol with the remark “Caution” refers to a hazardous situation for a person and/or the product. Failure to comply with these instructions can cause bodily injuries to yourself and/or others as well as damage to machinery.

Note

This picture symbol with the remark “Note” contains information for use and helpful tips to assist an individual when repairing a specified unit or vehicle.

Precautions for working with HFC134a (R134a) Refrigerant and Polyalkylene Glycol (PAG) Refrigerant Oil

Warning

- Do no breath A/C refrigerant, oil vapor, or mist. Exposure may cause irritation to the eyes, nose, and throat.
- Instances where there are accidental system discharges; ventilate work area before resuming service.
- For additional health and safety information, contact the refrigerant and oil manufacturers.

Caution

- **The air conditioning system uses HFC134a (R134a) refrigerant and polyalkylene glycol (PAG) refrigerant oil, which are not compatible with CFC-12 (R12) refrigerant, mineral oil, or PVE oil. If the refrigerants or oils are mixed, the compressor may fail.**
- Do not attempt to use R-12 servicing equipment. Failure to follow this statement may result in personal injury or equipment damages.
- Use service equipment that is only U.L listed and certified in which meets the required standards of SAE J2210 to remove HFC134a (R134a) from the air condition system.
- Before testing, please authenticate the HFC134a (R134a) refrigerant in the vehicle system and recycling equipment / recovery tank are contaminate free by using a refrigerant identifier.

Note

The air conditioning system is designed only for certain polyalkylene glycol (PAG) refrigerant oil for HFC134a (R134a) A/C systems and HFC134a (R134a) components. The only recommended oil for this particular system is PAG oil (PAG 46, 100, and 150). The PAG oil is very hygroscopic, meaning it absorbs water. Without appropriate sealing, the oil will become moisture saturated and should not be used.

Note

All equipment must be serviced by trained professionals only.

R134a service equipment and/or vehicle air conditioning systems should not be pressure or leak tested with compressed air.

- Air conditioning system may consist of R134a fluorescent dye to determine leak detection. Examine with a high intensity ultraviolet light system.
- Specified labels on unit will identify systems that contain fluorescent dye.

Note

Follow the handling procedures listed below:

- Only use the specified PAG oil from a sealed container. PAG 46, 100, and 150
- After use, immediately reseal containers of oil.
- To avoid contamination, do not return oil to original container once it has been dispensed. Additionally, never combine oil with other refrigerant oils.
- Do not allow PAG oil to come in contact with styrofoam parts. In such occurrences, damage may result.
- Do not allow PAG oil in contact with vehicle paint. In such occurrences, damage may result.
- In order to diminish the amount of moisture that enters the system, any connection in the refrigerant loop that is open must be closed as soon as possible.
- It is recommended for components that are replaced to have dust caps left in place until the component is ready to be installed in the refrigerant loop.
- Once components are removed from the refrigerant loop they should have dust caps in place as soon as possible in order to limit and minimize moisture intrusion.

Important Safety Notices

Warning

Ill-advised practices, negligence, and/or ignoring warning signs may cause death, personal injury, equipment or property damages.

Before proceeding please read and understand all safety precautions and warnings. The list as follows contains the general safety provisions that must be followed.

Work areas should be dry, well lit, ventilated, and free of clutter such as loose tools, parts, ignition sources and hazardous substances. All personnel must be aware of hazardous conditions that can coexist.

- Wear protective shoes when working. Opened toed shoes are not allowed.
- Rotating parts can cause cuts, mutilation, or strangulation. Be alert at all times when operating machinery.
- When working, do not wear loose-fitting or torn clothing. Additionally, do not wear jewelry. These are hazards that may cause personal injury.
- Before beginning any repairs, disconnect the battery (negative [-] cable) from both battery boxes and discharge any capacitors.
- To prevent accidental engine starting disconnect the air starting motor, if equipped.
- To prevent personal injury or harm to the specified unit place a “do not operate” tag in the operator’s compartment or on the controls.
- Before operating, allow the engine to cool.
- Always use blocks or proper stands to support the vehicle or vehicle components before executing service repairs. It is important that one does not operate on anything that is supported only by lifting jacks or a hoist.
- To reduce the probability of personal injury, use a hoist or get assistance when lifting components that weigh 23 kg [50 lbs.] or more. Make certain all lifting devices such as chains, hooks, or slings are in good condition and are of the correct load capacity. Furthermore, all lifting devices must be positioned correctly. When needed, always use a spreader bar. Also, lifting hooks must not be side-loaded.
- When handling corrosion inhibitors and lubricating oils avoid exposure to eyes and repeated contact to skin for they may contain alkali. In case of contact, immediately wash skin with soap and water. When cases are severe, please contact a physician. Store toxic products and substances out of reach of children.
- Naptha and Methyl Ethyl Ketone (MEK) are flammable and hazardous materials and must be used with attentiveness. Follow manufacture guidelines to ensure safety when handling materials. Store toxic products and substances out of reach of children.
- When operating on a vehicle be attentive and cautious for hot parts on systems that have been turned off, exhaust gas flow, and hot fluids in lines, tubs, and compartments. Direct contact to skin may cause severe burns.
- Always use tools that are in good working condition. Service technicians must be trained and have proper understanding on how to use the tools before administering service.
- When replacing items use the same and/or equivalent fastener part number at all times. Conversely, do not use a fastener of reduced quality if replacement is needed.
- To prevent bodily injury or harm do not perform any repairs when impaired, fatigued or after consuming alcohol or drugs that can impair one’s functioning.
- According to several states and federal agencies within the United States of America it has been evident that used engine oil can be carcinogenic, causing reproductive toxicity. That being said, avoid inhalation of vapors, ingestion, and prolonged contact with used engine oil.
- Be mindful that liquefied petroleum gas is denser than air and can accumulate near the floor, in slumps, and low-lying area.
- Close the manual fuel valves prior to performing maintenance and repairs and when storing the vehicle inside.
- **California Proposition 65 Warning** – Diesel engine exhaust and some of its constituents are known to the state of California to cause cancer, birth defects, and other reproductive harm. To request more information regarding the chemical exposures that are the basis of the warning, contact the manufacture of the product.



**The eCoolPark Unit Must Remain Upright at All Times.
The refrigerant inlet/outlet at the bottom of the unit should
be capped at all times.**

Section 609 of the 1990 Clean Air Act also established an important statutory structure to control the release of refrigerants from motor vehicle air conditioners into the atmosphere. Any person repairing or servicing motor vehicle air conditioners for consideration must properly use refrigerant recycling equipment that has been approved by the EPA.

Technicians who repair or service motor vehicle air conditioners for consideration must be trained and certified by an EPA-approved technician training and certification program. Technicians who repair or service MVAC-like appliances must always be certified by an EPA-approved 609 program.

Under Section 609 of the Clean Air Act, EPA-approved technician training and certification programs provide education on the proper use of MVAC servicing equipment, the regulatory requirements of the Clean Air Act, the importance of refrigerant recovery, as well as the effects of improper handling of refrigerants on the ozone layer and climate system. To be certified, technicians must be trained by an EPA-approved program and pass a test demonstrating their knowledge in these areas. Section 609 certification is required to service any motor vehicle air conditioning system for consideration (e.g., payment or bartering), regardless of the refrigerant used in the system.

Ford Explorer Kit - #1002386000

<i>Part Number</i>	<i>Description</i>	<i>Quantity in Kit</i>
1002904433	eCoolPark Unit 12V	1
1002694868	Kit, HVAC – Hose Routing	1
1002777315	Kit, HVAC – Spare Parts	1
1002698610	Kit, HVAC – eCool 1.0 M2 Mounting Bracket	1
514100	Washer - #10 – M5 Flat	2
600283	Screw, Self-Drill	12
650984	Fuse, 30 Amp ATC	1
1000021997	Fitting, #6 90 Fem o-ring	1
1000022005	Fitting, #8 90 Fem o-ring	1
610009	Nut, M10 x 1.5 Serrated THD Hex	2
1002349160	Sheet Metal Component – Top Bracket	1
1002346508	Wire Harness – eCoolPark Main Vehicle	1
1002368371	Wire Harness – eCoolPark Ignition	1
1002385749	Weld-Assy – Lower Mount	1
1002609482	Wire Harness – OBDII CAN Jumper	1
1002399500	Electrical Component, Misc – Relay 898H IC	
1002406632	Wire Harness – Explorer Condenser	1
1002688919	Decal – eCoolPark Charge	2
1002783102	Fitting, Steel – CV to 6H	1
1002753993	Tube Assy, Steel – 90 CV to 8H	1
1002907693	Fitting, Steel – Check Valve - 8	1
1002786080	Fitting, Steel – Discharge Tee	1
1002631959	Fitting, Steel – #14-14-8 T Splice	1
1002973160	Lubricant – PAG 46-H 4oz	1
1002974395	Cardboard - Template	1
1001260067	Hose, #6 Bulk 4890 Refrig	25 ft.
1001260070	Hose, #8 Bulk 4890 Refrig	25 ft.

For Missing Parts:
NITE Technical Service Line: 1-866-204-8570

Electrical Kit - #1002407230

B223109	Fuse Holder	2
B360113	Tie - Plastic	50
520260	Grommet, Flexible	2
600283	Screw, Self-Drill	2
640377	Bag, 3 x inch Static	2
640378	Bag, Plain Plastic 12 x 12	1
651459	Iso-Relay, 12V	2
651462	Tubing Heat Shrink	6
670136	Terminal Ring 5/16 4 AWG	4
670137	Terminal Ring 3/8 4 AWG	2
1000174286	Fuse holder, Mega Bolt-on	1
1000230085	Fuse, 5A ATO	2
B223106	Fuse, 20A	1
1000247777	Terminal 3/8" Ring 14-16 AWG Sealed	3
1000247778	Terminal 3/8" Ring 18-20 AWG Sealed	4
1000247779	Butt Connector Step 14-16 to 18-20	2
1001268553	Fuse, Mega 80A Red	1
1001268595	Terminal, Electric – 12-10 Butt Splice	1
1002404439	Electrical Comp, Micro2 Add-a-Fuse	1
1002404448	Electrical Comp, Fuse, 5A Micro2	1
1002404450	Electrical Comp, Light, Indicator	1
1002618099	Switch – Rocker, eCoolPark – 12V	1

eCoolPark Electrical Service Kit - #10028739006 (Only 1 per upfitter needed)

1002519049	Printed Material Website Details	1
1002839003	120 Ohm Termination Resistor	2
1002839004	Peak USB Adaptor	1
1002839005	Wire Harness – eCoolPark Service	1

Refrigerant Hose Clamp Ratcheting Pliers (Only 1 per upfitter needed)

1001458325	Hose Crimp Pliers	1
------------	-------------------	---

This list is subject to change. Some tools may not be used.

- Drill Bit Set
- Hole Saws (up to 2")
- Electric/Air Drill
- Screwdrivers/Assorted Bits (Flat and Phillips)
- Impact Gun
- Air Saw/Jigsaw (Sheet Metal/Steel Cutting)
- Torx Head Bit Set (T20 and T25)
- Metric and SAE Wrenches
- 1/4" and 3/8" Drive Ratchets
- Metric and SAE Socket Set
- Wire Cutters (up to 2/0)
- Terminal Crimpers
- Wire Strippers (up to 2/0)
- Heat Gun
- Razor Knife
- Painters Tape
- Snake Tool
- Electrical Tape
- Hose Cutters
- #4 Professional Grade Cable Crimpers
- Work Light
- Torque Wrench up to 150 in/lbs.
- U-barrel Crimpers
- Pop Rivet Gun
- Upholstery Tools
- Deutsch Crimpers
- Step Bit
- Refrigerant Hose Clamp Ratcheting Pliers
- Refrigerant Machine or the Following:
 - Tank of Virgin R-134a
 - Refrigerant Scale
 - Vacuum Pump
 - Gauge Set with Hoses
 - Recovery Machine



Section 1

Installation Procedures

eCoolPark 1.0 12V

Ford Explorer

Installation Manual





PLEASE READ!




The installation of this no-idle A/C system is done in several parts:

- The eCoolPark 1.0 unit includes a compressor, an ECU (electric control unit), and a cooling fan. It is installed in the trunk of the vehicle.
- The OEM refrigerant lines of the vehicle are altered using “T” fittings and hoses are run from the T’s to the eCoolPark unit.
- Electrical harnesses are routed between the eCoolPark unit, power source, and driver compartment. Additionally, a harness is routed to jump in-between the OEM condenser harness.

It is important that the technician completing this installation read through this manual and plan out the steps forthcoming. **Certain mistakes like cutting hoses to short or drilling into refrigerant hoses can cause long installation delays and/or component damage.**

Hose Routing Preview

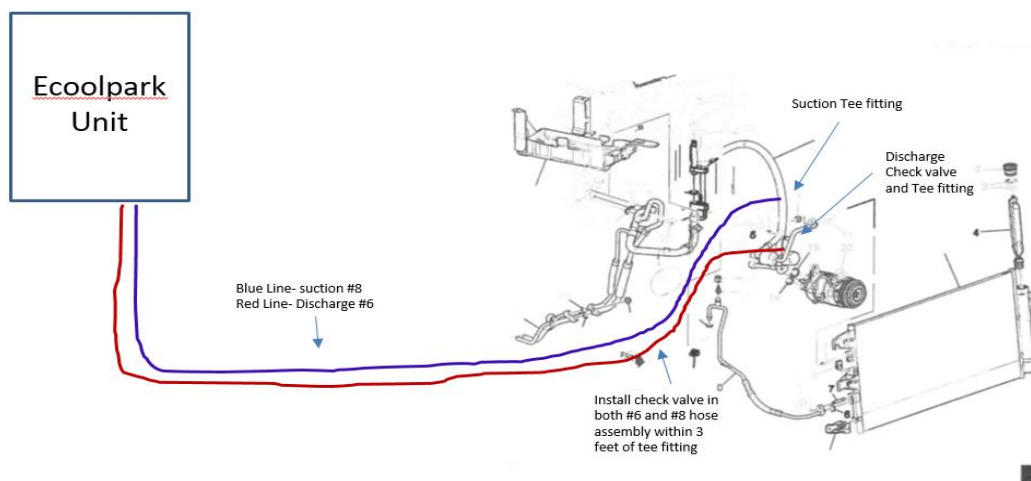

The following steps will provide a description of the procedure outlined above in detail.

1. Disconnect Power Source and Reclaim OEM Refrigerant


- a. Disconnect the desired power source for the duration of the install. The vehicle main start battery can remain connected.
- b. Reclaim the existing refrigerant in the OEM system using a refrigerant machine or refrigerant reclamation components.
-  c. Reclamation should be done by a Section 609 certified technician.
- d. If a Robinair or refrigerant machine equivalent is not available, components needed include an R-134a or R-1234yf recovery machine, a recovery tank, and a gauge set with SAE hoses.



Figure 1.1: Robinair Machine



Figure 1.2: Gauge Set



Figure 1.3: Recovery Machine

2. Prepare and Loose Fit eCoolPark Unit

- a. Install the 2 mounting feet on the cooling fan side of the eCoolPark unit using the provided 10-32" screws. Additionally, install 1 more mounting foot on the bottom left corner of the unit.
- b. Attach the lower support bracket to the unit using the provided nuts. Attach the upper support bracket to the unit by removing the top right screw on the unit.
- c. The unit will be installed in the driver side rear compartment shown in figure 1.4 and 1.5. The plastic coverings in this location will have to be temporarily removed.
- d. Pop out the grommet in the floor of the vehicle and enlarge the opening with an airsaw (enough to fit 2 hose fittings, without rubbing, through the hole). Also remove the 2 bolts located in this region (figure 1.7).
- e. If needed, mark and remove the necessary portion of the OEM body seam sealer to allow the eCoolPark unit to sit level. (figure 1.6)

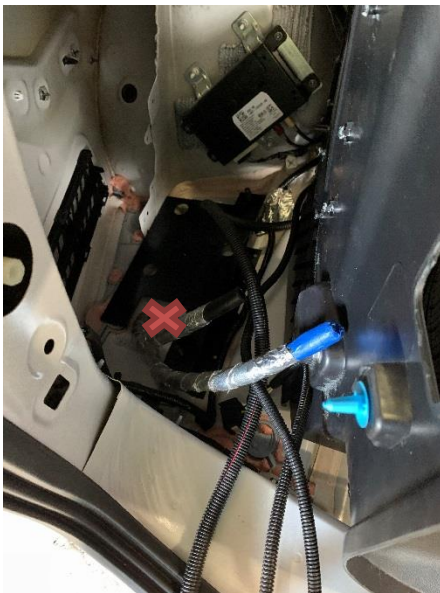


Figure 1.4: Floor of Unit Location



Figure 1.5: Left Rear Side Compartment w/ Unit Installed



Figure 1.6: Portion of Seam Sealer to Remove



Figure 1.7: Bolts that require removal

3. Run Hoses (loose)




- a. Locate the position where the hoses will exit the interior of the vehicle (marked with X in figure 1.4).
-  b. Verify the opening is large enough for both hose fittings. If not, use an air saw to enlarge the hole. Before drilling check for obstruction under the vehicle.
-  c. Locate the 2 different sized hoses in the kit and wrap the entirety of each hose separately with heat shield tape (figure 1.9). Leave 1 foot of un-taped hose on each end. **Tape the ends of the hoses with masking or painters tape to avoid contamination.**
- d. Route the hoses from the unit, under the vehicle, over to the passenger side, and into the engine bay. Securely zip tie the hoses to the existing A/C lines and leave the ends loose for now. Be sure no hoses are rubbing against rough or sharp surfaces.
- e. The hoses should be wrapped in heat shield tape completely in-between the unit and engine bay.
-  f. Vehicle technicians should identify the best way to route these hoses. **Stay away from hot components such as exhaust.**



Figure 1.8: Location of Hose Routing Hole



Figure 1.9: Hoses Routed Under Vehicle

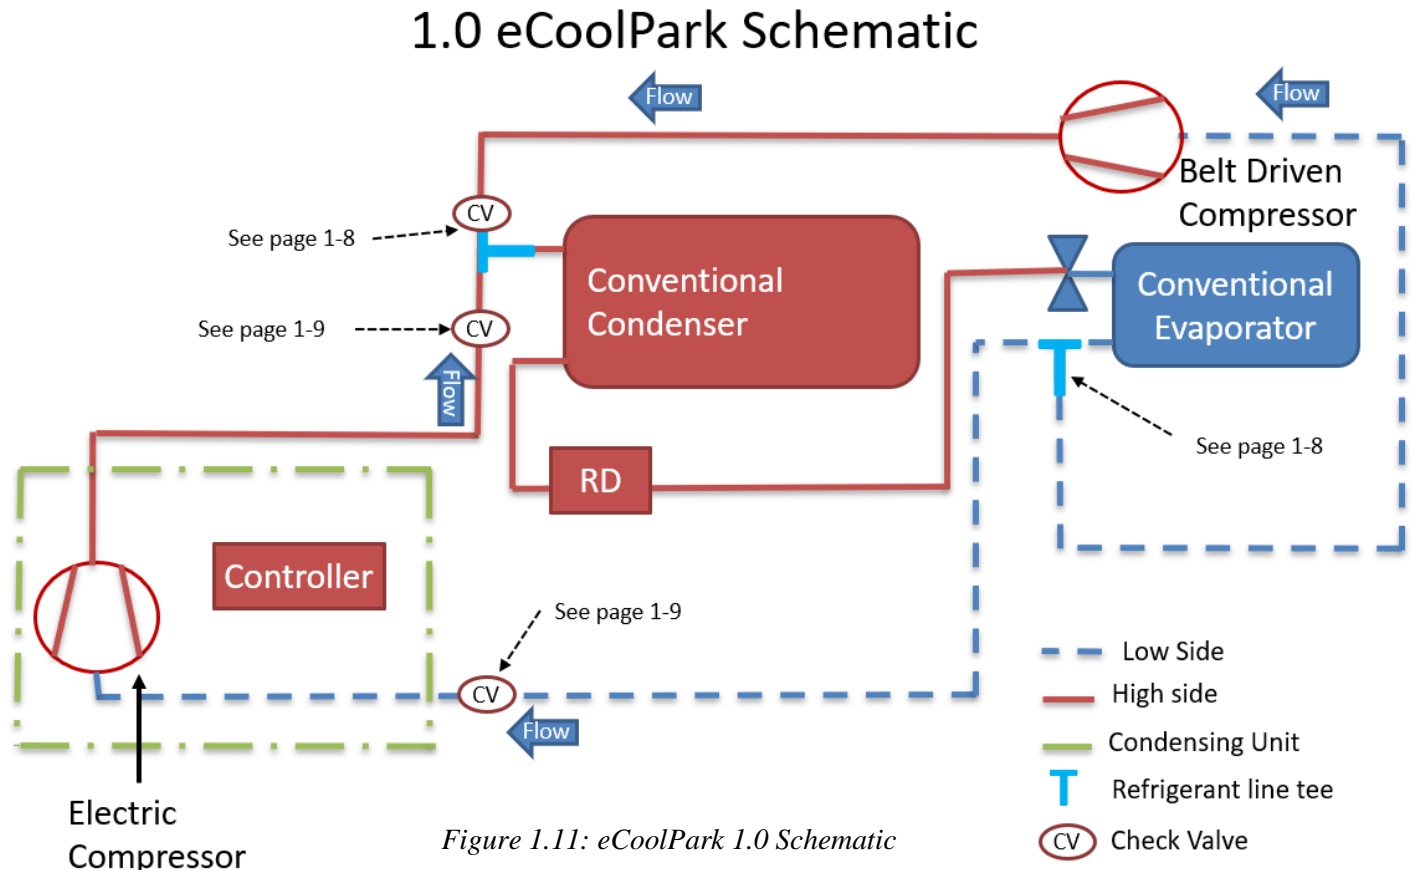


Figure 1.10: Hoses Routed into Engine Bay

4. Identify OEM Refrigerant Tubing/Hoses and Install T Fittings

- Take a minute to study the schematic shown in figure 1.11. Note the T locations in which the eCoolPark system uses to access the OEM refrigerant system.
- Identify the refrigerant lines where the T's will be inserted. These will be the compressor discharge line (compressor to condenser) and the compressor suction line (TXV to compressor).
- Confirm that the hose in the suction and discharge section of OEM hose is suitable for the fittings provided in the Bergstrom kit. Hose should be Galaxy 4890 $\frac{3}{4}$ in. and $\frac{13}{32}$ in. If not labeled, measure the ID and OD and consult figure 1.16.
- Assemble the discharge T and check valves per page 1-7. Remove the OEM discharge line by loosening the nuts on the compressor and condenser connections. The OEM suction line can stay inserted in the vehicle. Mockup the suction 14-14-8 T on the suction line (figure 1.12). The discharge line will have a T hose fitting inserted in the hose section of the discharge line (figure 1.13).


The arrows on the check valves must point in the direction of flow




Assemble Discharge T Fitting and Check Valves

Assemble the discharge T fitting and check valves outside of the vehicle. All fittings are bagged with required o-rings and hardware. Be sure to attach o-rings to check valve fittings and add a small amount of oil to lubricate their assembly. Torque Allen bolts to 7 Nm (62 inch-lbs). Fittings will still rotate inside check valve assembly when tightened.

Discharge T

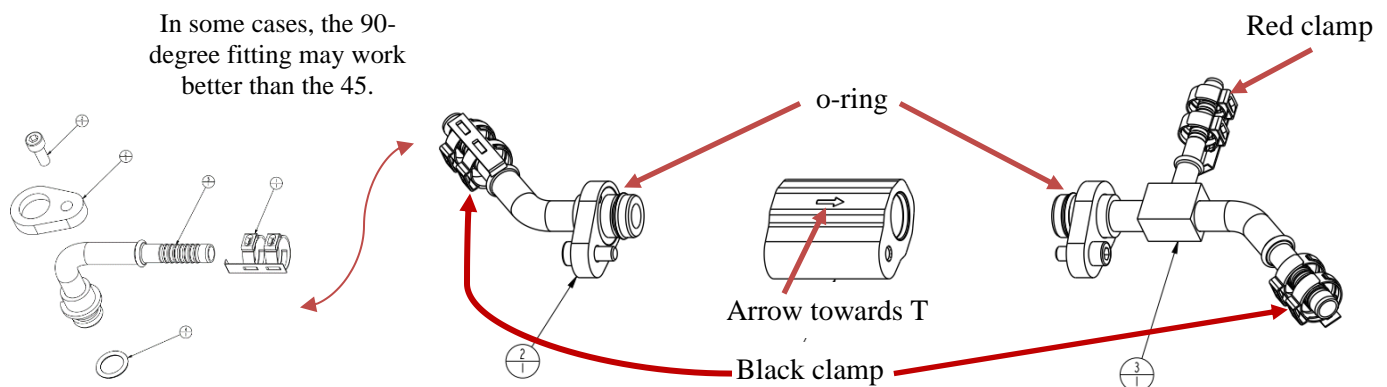

Check Valves

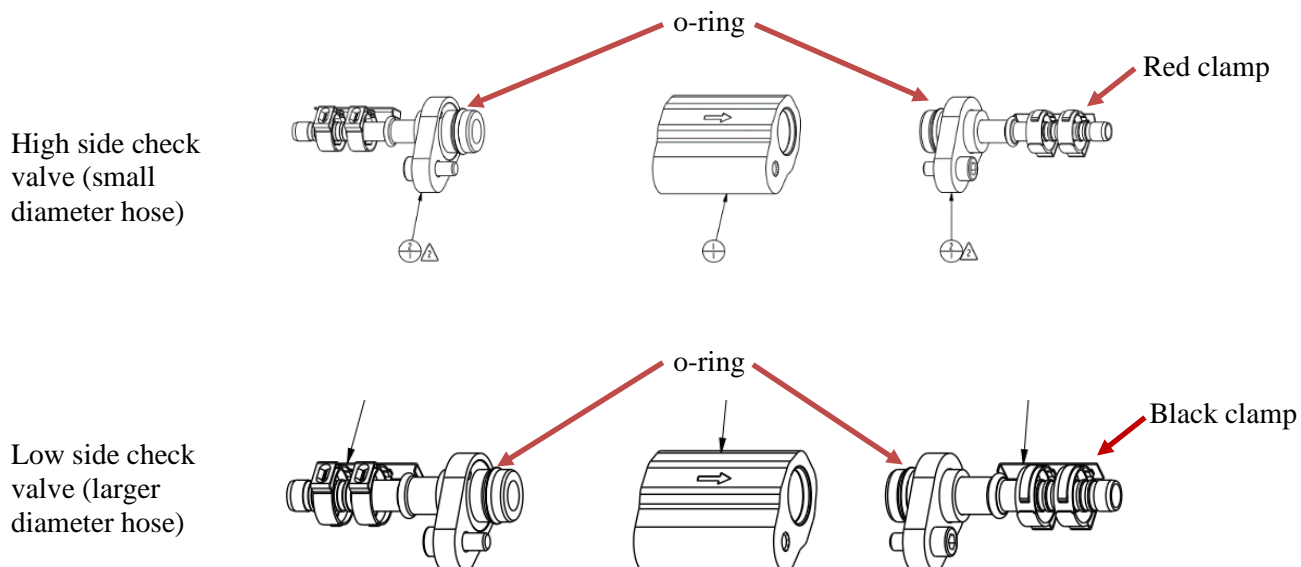

Suction Line



Figure 1.12: Suction Line T

Mockup the T fitting on the hose and use a marker to mark the hose at the end of the barb fitting. Cut the hose and insert fitting into hose using oil lubricant.

Make sure to insert hose clamp before attaching hose!!!

Discharge Line



Cut the hose in the OEM discharge line 5 inches from the condenser port as shown. Cut the hose 2 1/4 inches from the compressor port as shown. Install the assembly in the OEM discharge tubing and reinstall in vehicle. !!!!Try cutting the hose long at first and insert the entire line into the vehicle to see how it fits. Remove, cut more hose back, and insert again until the entire line fits correctly.

The check valve will insert on the OEM compressor side. Leave the eCoolPark leg of the T fitting in an upwards position, **NOT DOWN**.


Make sure to insert hose clamp before attaching hose!!!



Figure 1.13: Discharge Line Alteration

Check Valves


1.0 eCoolPark Schematic

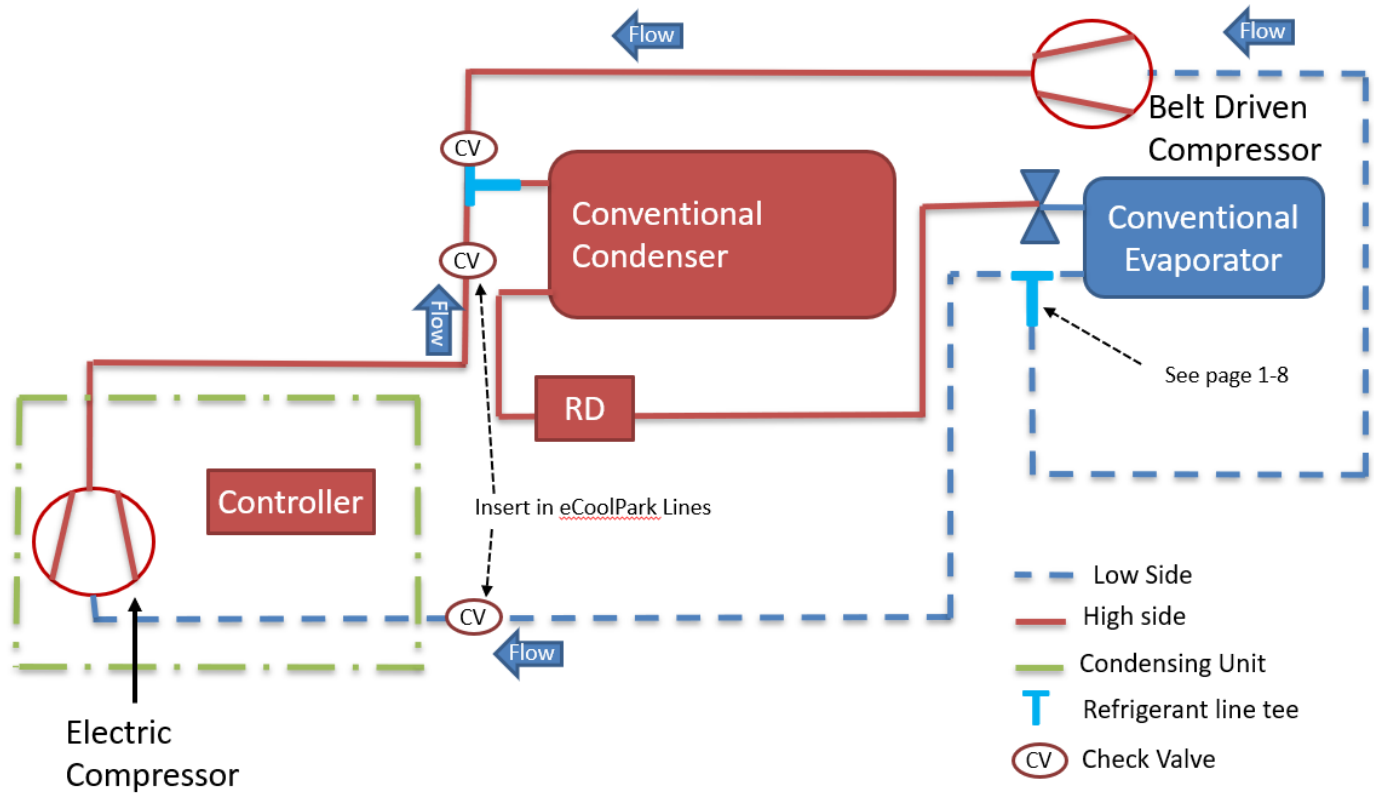

There are a total of 3 check valves inserted into the system. One is attached to the new discharge T fitting and should have been inserted with the previous instruction. The other two check valves are inserted into the hoses of the eCoolPark section using straight hose fittings. Insert the 2 check valves in the eCoolPark hoses using the provided #6 & #8 straight check valve hose fittings. Page 1-7 shows the assembly with the correct color hose clamps.

Insert the discharge check valve close to the T fitting (in the engine bay or close to it) and the suction check valve close to the eCoolPark unit (near the eCoolPark compressor unit). Arrows on check valves must point in direction of flow.

5. Connect to Hoses

- a. Connect the T's to the loose hose ran in step 3. Before cutting, be wary of routing – mockup before cutting. Observe where hoses will secure and avoid very hot components. Be sure there are no kinks in the hose.
- b. Use hose clamps to secure the hoses to the T fittings. Use the ratcheting tool provided by Bergstrom. Correct procedure is shown in figure 1.21.
- c. Like shown in figure 1.12, the suction line eCoolPark hose will route around to the left of the metal component. Use zip ties to secure and tar tape to protect from rubbing on surfaces.
- d. The discharge line eCoolPark hose will route straight up and towards the rear of the vehicle.
-  e. Wrap hose in heat shield tape where necessary (if up against component). Wrap check valve and secure using zip ties.
- f. If you have any concerns about the install of these fittings or are unsure of the correct steps to take, consult a Bergstrom employee.


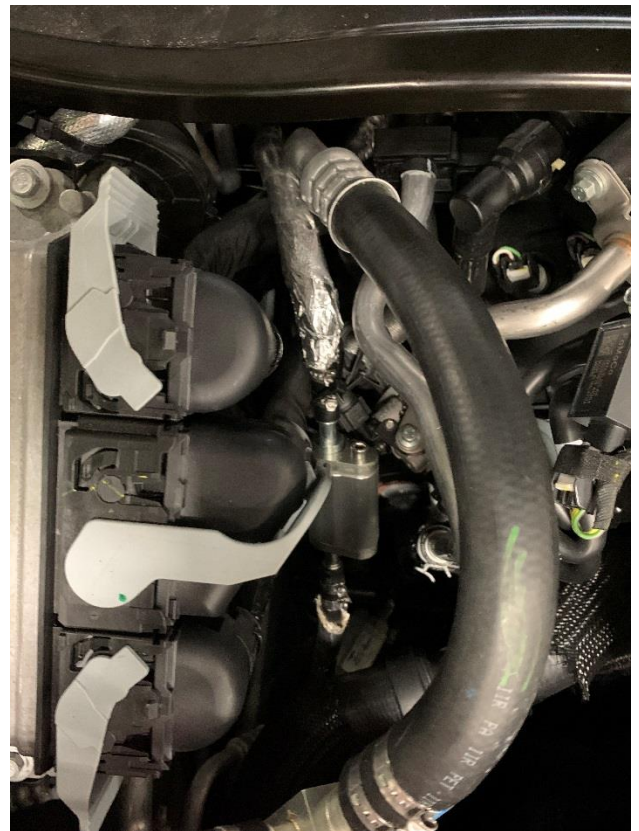


Figure 1.14: Completed Suction and Discharge Lines

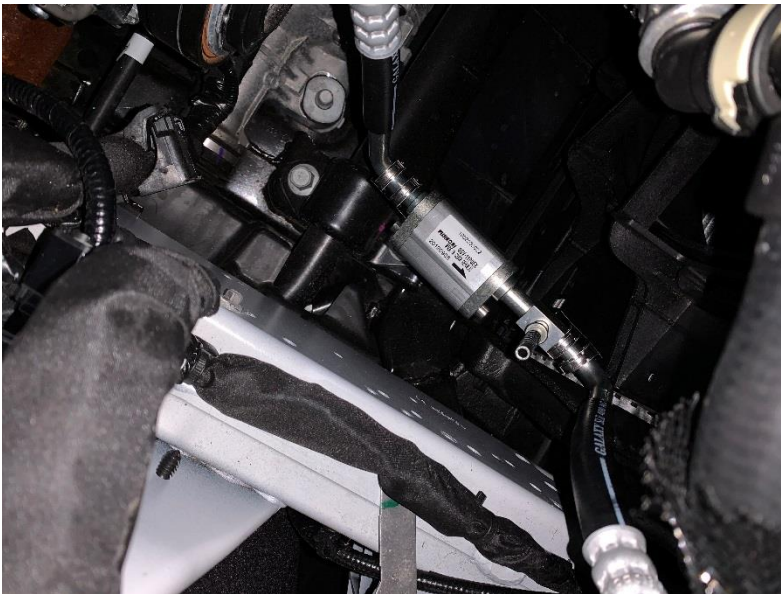

The arrows on the check valves must point in the direction of flow

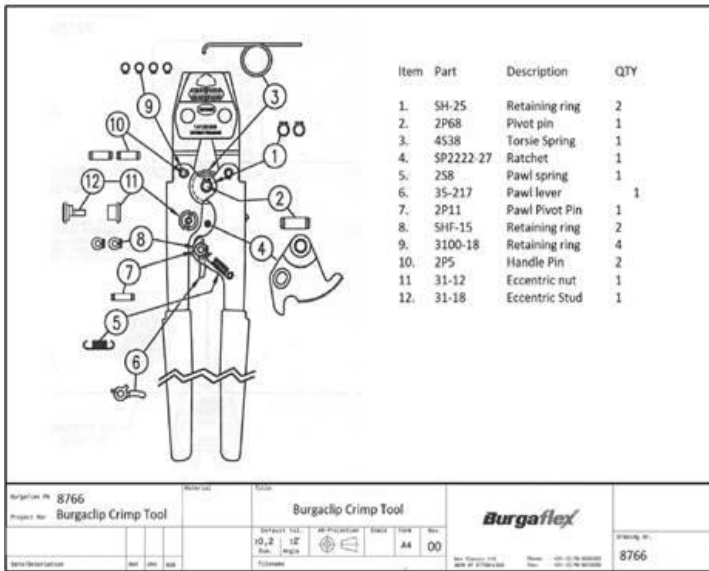


Figure 1.15: Ratcheting Refrigerant Hose Crimpers

ATCO Hose Clamp Assembly (packaged in quantities of 10)

Hose Size: No. 6	Color: Red	2660000 1000025384
Hose Size: No. 8	Color: Black	2660001 1000025389
Hose Size: No. 10	Color: Yellow	2660002 1000025392
Hose Size: No. 12	Color: Green	2660003 1000197772

Figure 1.17: Hose Clamp Color Code

Length: 50 Ft.	Hose Inner Diameter: 5/16" (7.9mm)	Hose Outer Diameter: 3/4" (19.1mm)	2610001
Hose Size: No. 6			550307
Length: 50 Ft.	Hose Inner Diameter: 13/32" (10.3mm)	Hose Outer Diameter: 29/32" (23mm)	2610002
Hose Size: No. 8			550308
Length: 50 Ft.	Hose Inner Diameter: 1/2" (12.7mm)	Hose Outer Diameter: 1" (25.4mm)	2610003
Hose Size: No. 10			550309
Length: 50 Ft.	Hose Inner Diameter: 5/8" (15.9mm)	Hose Outer Diameter: 1 1/8" (28.6mm)	2610004
Hose Size: No. 12			550310
Length: 825 Ft.	Hose Inner Diameter: 5/16" (7.9mm)	Hose Outer Diameter: 3/4" (19.1mm)	2610001-DS
Hose Size: No. 6			1002300977
Length: 725 Ft.	Hose Inner Diameter: 13/32" (10.3mm)	Hose Outer Diameter: 29/32" (23mm)	2610002-DS
Hose Size: No. 8			1002301587
Length: 700 Ft.	Hose Inner Diameter: 1/2" (12.7mm)	Hose Outer Diameter: 1" (25.4mm)	2610003-DS
Hose Size: No. 10			1002301589

Figure 1.16: Hose ID/OD

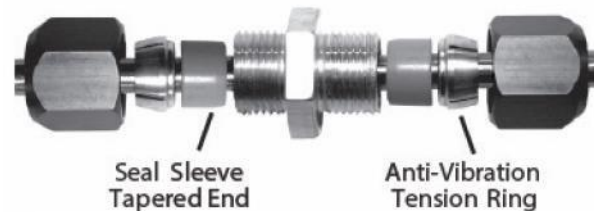


Figure 1.18: Compression T

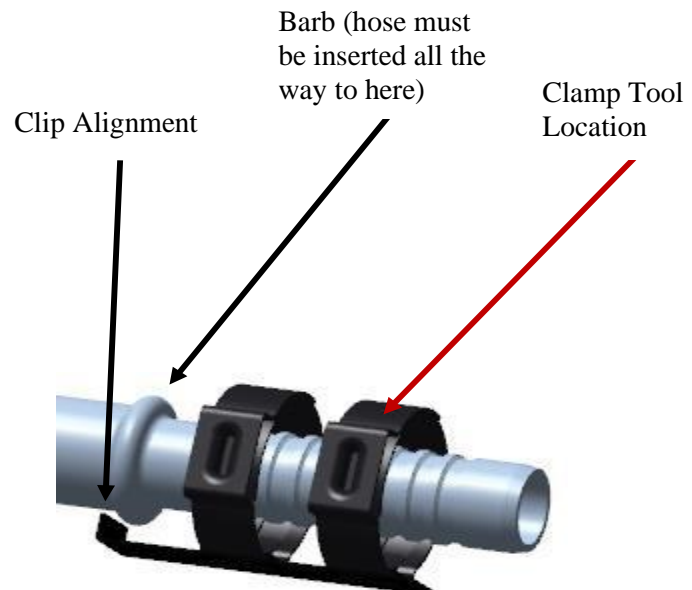


Figure 1.19: Hose Clamp Procedure

6. Secure Hoses and Connect to Unit


- a. The loose hoses in the engine bay should now be connected to the refrigerant T's. If not already completed, secure the hoses down to the bottom of the vehicle, along the rail or OEM lines, and up to the unit. Hoses should not rub against even a smooth surface. Hoses should not be up against sharp or hot surfaces. Figure 1.20 shows an example of how **NOT** to leave hoses.
-  b. If without a refrigerant machine: Insert 3 ounces of provided PAG oil into system via loose hoses.
- c. Both eCoolPark side check valves should have been inserted into the hose. Make sure to wrap them both with heat shield tape and find a way to secure it whether it's zip tied to other lines/electrical or p-clamped.
- d. Mockup the fittings on the eCoolPark unit to determine the correct length of hose to cut and the proper orientation/rotation of the fittings.
- e. Use the provided check valve hose 90 degree fittings to connect to the unit. The suction and discharge inlet/outlet should be labeled on the unit.
- f. Once completed, secure unit to vehicle floor using the provided 5/16 hex head self-drilling screws. The bottom left and top bracket will use self-tapping screws to secure to vehicle.
- g. Lastly, 1/2" holes must be drilled into the plastic cover near the eCoolPark unit cooling fan (figure 1.21).



Figure 1.20: Hose Rub (NOT ACCEPTABLE)

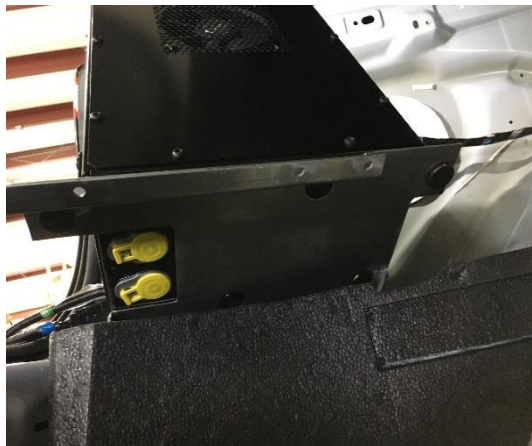


Figure 1.21: Plastic Cover Modification



Figure 1.22: Bottom of eCoolPark Unit

AIR-O-CRIMP Fittings

AIR-O-CRIMP Assembly

Cut or trim the hose.

Cut or trim the hose to the desired length using the kwikcut hose cutter. The cut should be made square to the hose length.



Assemble the clamp.

Assemble the clamp assembly onto the hose with the locator tab positioned approximately where the fitting groove will be when the fitting is assembled.



Apply refrigerant oil.

Apply a small amount of refrigerant oil (PAG or Ester) to the fitting barb and o-rings (optional). Assemble the fitting into the hose until the hose touches the ramped step on the fitting. Adjust the clamp assembly so the tab on the locator "snaps" into the groove of the fitting.



Crimp clamps.

Using the air crimp gun or the manual crimp pliers, crimp each clamp separately.

Caution: If using the manual pliers, make sure that there is a metal to metal contact of the clamp ear when the crimp is made. There will be a slight amount of spring-back of the clamp ear when the crimp pliers are released. Failure to fully close the clamp may result in refrigerant leaks.



Locator comes off.

The locator will "pop off" after the second clamp is crimped and can be discarded. The result is a clean appearance and a reliable assembly.



Note: Use ratcheting style hose clamp pliers. Use of the non-ratcheting style may cause leaks in the system.

Figure 1.23: Air-o-crimp Assembly Instructions

7. Leak Check and Charge System




- a. Vacuum the system for 30 minutes. Use of a refrigerant machine is suggested. Additionally, a standalone vacuum pump may be used with a gauge set.
-  b. **BE SURE TO VACUUM FROM BOTH CHARGE PORTS (HIGH AND LOW SIDE).**
- c. Close quick disconnect fittings and leak check system by letting it sit for 30-40 minutes. Mark the pressure on the low side before and after the allotted time. If the pressure does not change after 30 minutes, the system is leak free! If the pressure does change, refer to page 1-12 on searching for a leak in the system before proceeding.
-  d. Charge the system with the factory charge + 4 oz. of virgin R-134a/R-1234yf (consult vehicle refrigerant tag) using a refrigerant machine. Insert 3 oz. PAG oil with the charge.
- e. If a refrigerant machine is not used, you will need to complete Section 2 – Electrical before charging.
- f. For without a refrigerant machine – use a virgin tank of R-134a, a scale, and gauge set to charge the system on the low side. Once charged with about 3-4 ounces, run the eCoolPark unit to suck in the rest of the refrigerant.
-  g. **CYCLE OEM AND eCoolPark SYSTEM 2-3 TIMES TO SPREAD REFRIGERANT.**
- h. Attach the eCoolPark charge sticker (#1002638118) over or near the OEM refrigerant sticker and write the charge level.



Figure 1.24: Robinair Machine



Figure 1.25: Refrigerant Scale



Figure 1.25: Refrigerant (R-134a) Tank

8. Checking for a Leak

- i. If there is a leak in the system, first try going through all the alteration made during the install and checking to make sure every nut and bolt is torqued to specification.
- j. Run the vacuum test again after tightening everything.
- k. Still have a leak? Charge the system with a small amount of refrigerant.
- l. Then, use a refrigerant sniffer tool to check all the connections in the system. The most common spot for a leak will be the compression T fittings.
- m. Repeat the vacuum test to assure there is no leak in the system.



Figure 1.26: Refrigerant Sniffer

Section 2

Electrical Installation

eCoolPark 1.0 12V

Ford Explorer

Installation Manual



1. Locate Electrical Harnesses

- a. There should be 3 main harnesses and a small jumper harness included in the kit.
- b. Main vehicle harness, Ignition harness, condenser harness and a small CAN jumper harness.
- c. Connect the main eCoolPark harness to the unit (round and square Deutsch/Amphenol).



Figure 2.1: eCoolPark Vehicle Harness



Figure 2.2: Ignition Harness

2. Routing Vehicle Harness

- a. Drill another pass through hole for the power cables near the eCoolPark unit where there is no obstruction underneath.
- b. Route the 4 AWG power cable and the 18 AWG 12/24 VDC remote (labeled as 12 REM) in the vehicle harness to the desired power source. Route from the unit, through the previously cut hole, and along the OEM refrigerant lines to the battery.
- c. Route both ground wires to a chassis ground stud near the eCoolPark.
- d. Route the 6-way square Deutsch connector and the 3-way condenser connector branch of the vehicle harness from the eCoolPark unit, into the middle vehicle channel, up into the center console, and over to underneath the steering wheel.
- e. Install the provided fuse holder with fuse in the up fitter's desired location near the power source. Cut the 4 AWG power cable to length and attach it to one end of the fuse holder. Leave the other end open for now.



Figure 2.3: 6-way Deutsch Branch



Figure 2.4: 12 V Remote Branch of Vehicle Harness



Figure 2.5: Fuse Holder with Fuse

3. Ignition Harness Connections

- Connect the 6-way Deutsch that was routed to the driver compartment to the 6-way Deutsch on the ignition harness.
- Unbolt the OEM OBD2 connector from the vehicle trim and connect to OBD2 jumper harness from Bergstrom. Connect the 2-way connector on the CAN jumper harness to the compatible 2-way connector on the ignition harness.
- Locate a B+ continuously powered fuse (always 12 VDC, even with engine off – consult vehicle manual) in the vehicle fuse box. Splice the orange “fused v-bat” from the ignition harness to the “add-a-fuse” provided in the kit. Attach the add-a-fuse to the located hot fuse. Place the existing fuse and provided 5 Amp fuse in the add-a-fuse.
- Cut holes in the up fitter’s desired location for the indicator light and the rocker switch, both of which are provided in the kit. (If not using, leave zip tied near fuses under the steering wheel.
- Route both of their harnesses up though the under the steering wheel compartment and connect them to the light and switch.



Figure 2.6: Indicator Light and Harness Connection



Figure 2.7: Fused V-bat

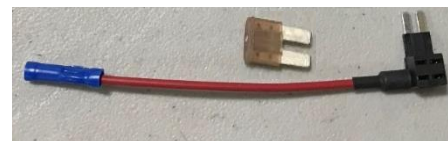


Figure 2.8: Add-a-fuse



Figure 2.9: Rocker Switch, Harness Connection, and Completed Install Cosmetic

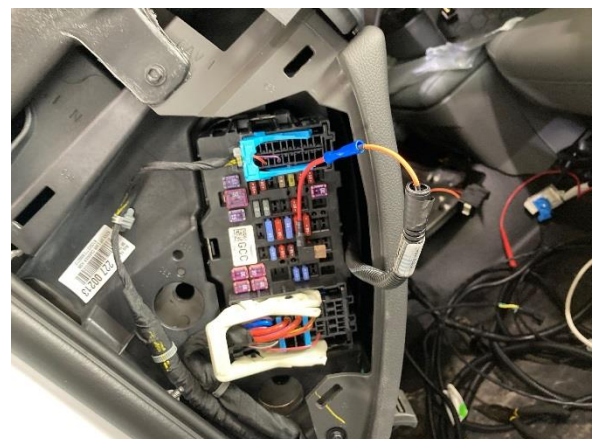


Figure 2.10: Completed Add-a-fuse

4. Ignition Harness Connections (cont.)

- a. Connect the provided condenser harness to the proper connector on the ignition harness. Route the harness through the engine bay, through the firewall, and to the OEM condenser. Secure along the way. Disconnect the OEM condenser fan connectors and splice in the Bergstrom harness.
- b. The dimmer branch of the harness is optional and should be connected to any dash light power source if needed. OPTIONAL
- c. If auto start/stop is installed and interfaced with eCoolPark, connect the “Enable” branch of the ignition harness to the corresponding output signal of the controller. Also, attach a relay to the relay holder on one of the branches of the ignition harness. And last, attach the “Ground IF” branch of the main vehicle harness to power source negative. OPTIONAL



Figure 2.11: Dimmer

5. Electrical Connection

- a. Make sure the 80 Amp fuse is installed in the fuse holder.
- b. Connect the open side of the main 80 Amp fuse holder to the positive side of the power source using 4 AWG cable and the provided 4 AWG ring terminals.
- c. Use the provided 18 AWG butt splice to splice in a fuse for the 12 Volt remote sense. Then connect to the positive side of the power source using the provided 14 AWG ring terminals. Insert the 5 Amp fuse into the fuse holder.
- d. Connect the negative 4 AWG and the SYS CTL GND from the eCoolPark unit to the negative side of the power source using the provided 4 AWG and 14 AWG ring terminals.
- e. Insert the 2 relays into the relay holders. One is located on the ignition harness in the driver compartment and the other is on the vehicle harness near the unit.



Figure 2.12: Remote Sense Fuse Holder



Figure 2.13: Ring Terminals



Figure 2.14: Butt Splices


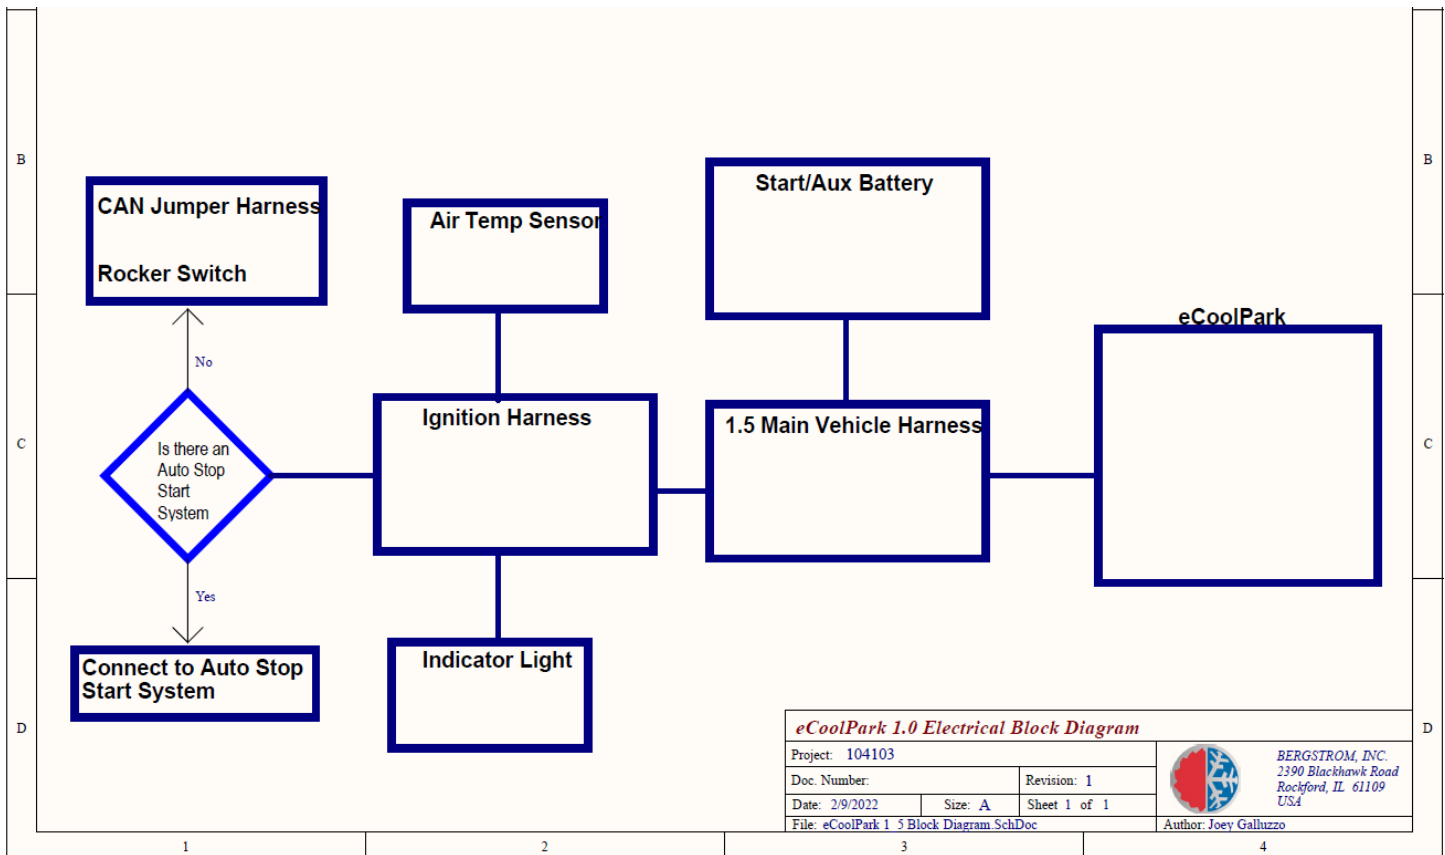


Figure 2.15: eCoolPark 1.0 Electrical Block Diagram

Electrical wiring diagram is subject to change. It may not be identical to the wiring for your specific vehicle.

2-8



Section 3

Operating Instructions

eCoolPark 1.0 12V

Ford Explorer

Installation Manual



The eCoolPark system has field configurable parameters that must be adjusted for each install using the Bergstrom field commissioning tool.

Installation Procedure (Only need to complete 1 time per upfitter):


Necessary Tools:

- Laptop
- Internet Connection


Open the zip folder for the tool using this link:


<https://www.bergstrominc.net/files/Tools/FieldCommissioningTool.zip>

Extract the files to a known location. Recommended: Create a new folder called “eCoolPark Field Configurable Tool” in the C: drive.

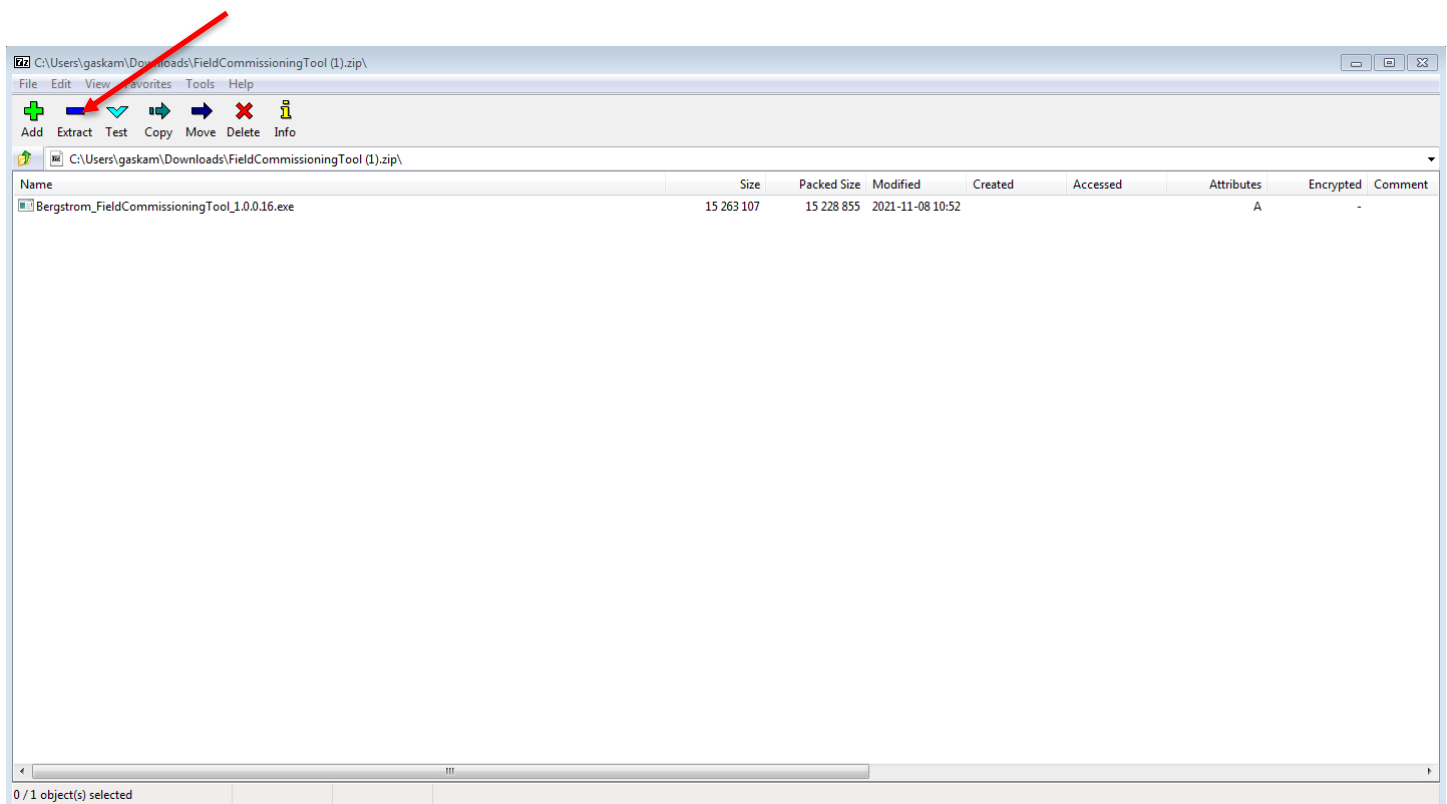


Locate and run the executable file in the folder where the tool was saved. Go through the installation process and save to the created eCoolPark folder.

Name	Date modified	Type	Size
 Bergstrom_FieldCommissioningTool_1.0.0.16.exe	11/8/2021 10:52 AM	Application	14,906 KB

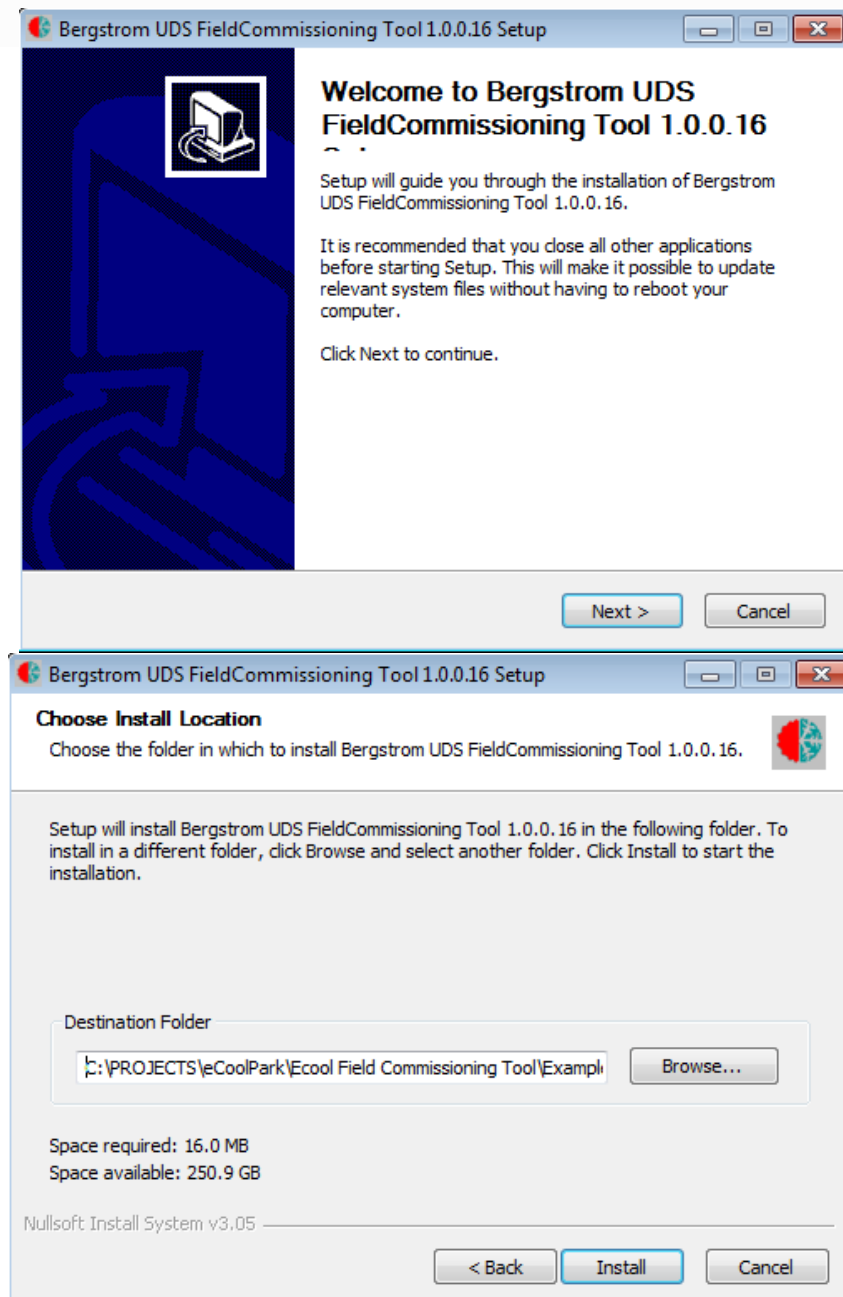


Confirm that the base configuration file is in the following location:
C:\Bergstrom_Commissioning

Name	Date modified	Type	Size
 base_eCoolPark_Configuration.bcsv	11/1/2021 3:49 PM	BCSV File	

Download PCAN USB Drivers:

Relocate to: <https://www.peak-system.com/Drivers.523.0.html?&L=1>

Download the drivers for your respective system. Go through the installation process and make sure the download is successful.

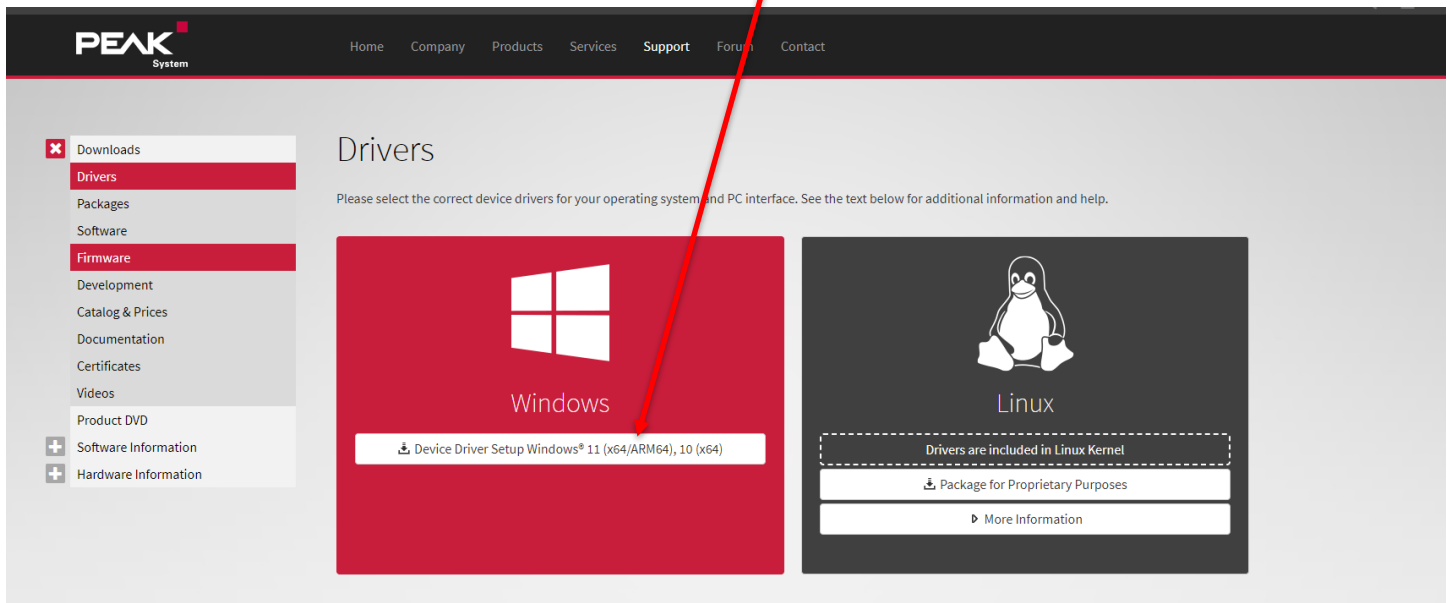

PEAK
System

Home Company Products Services **Support** Forum Contact

Downloads
Drivers
Packages
Software
Firmware
Development
Catalog & Prices
Documentation
Certificates
Videos
Product DVD

Drivers

Please select the correct device drivers for your operating system and PC interface. See the text below for additional information and help.

Windows

Device Driver Setup Windows® 11 (x64/ARM64), 10 (x64)

Linux

Drivers are included in Linux Kernel

Package for Proprietary Purposes


More Information

Operational Procedure:

Necessary Tools:


- Laptop
- eCoolPark Electrical Service Kit - #1002839006 (By purchase or comes with cost of training)
- Downloaded software (Field Commissioning Tool and PEAK PCAN USB Drivers)

If at any time you get a **red** error message in the Application Response window, please check that all the software described above has been installed correctly. Make sure the system is getting proper power (12 or 24 VDC) when requested. Use multi-meter to check pin 1 power on 6-way Deutsch connector at the eCoolPark unit (square connector pin 1).

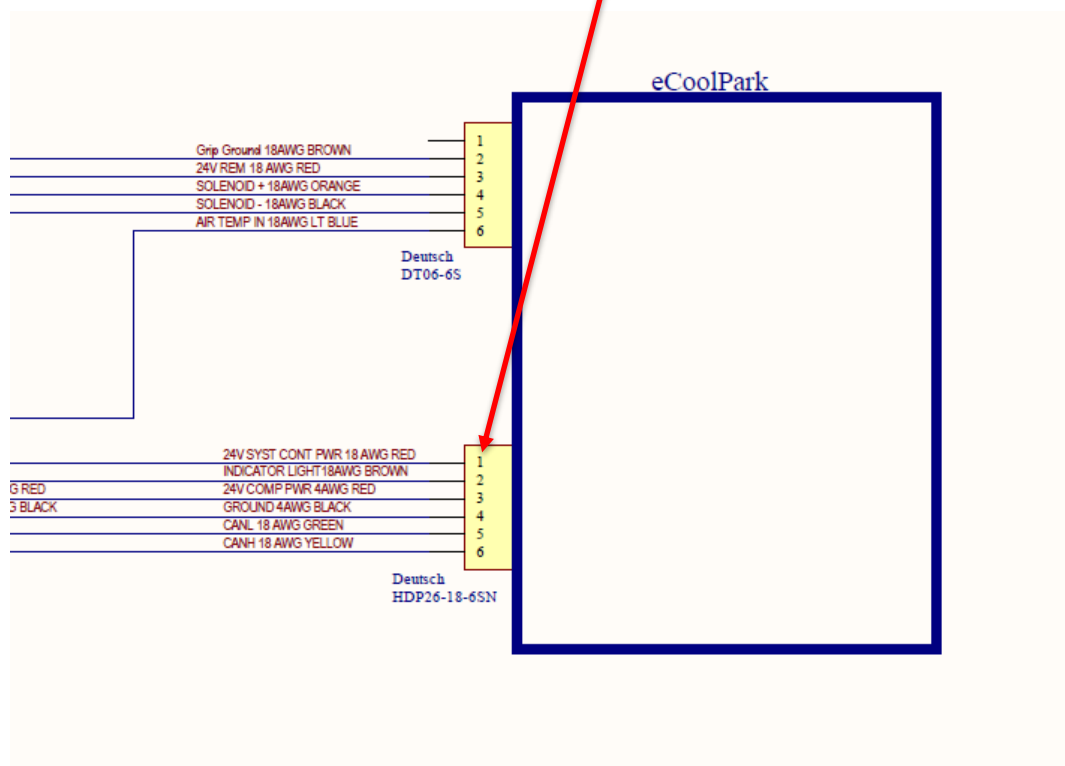

If necessary, contact a Bergstrom employee at: 1-866-204-8570

Connect the provided CAN to DB9 jumper harness to the ignition harness located in the driver under dash compartment using the 2-way CAN connector (Green and Yellow). Then connect your PCAN adapter to the harness via DB9 and to your computer via USB. Use termination resistors on the PEAK adaptor (provided).

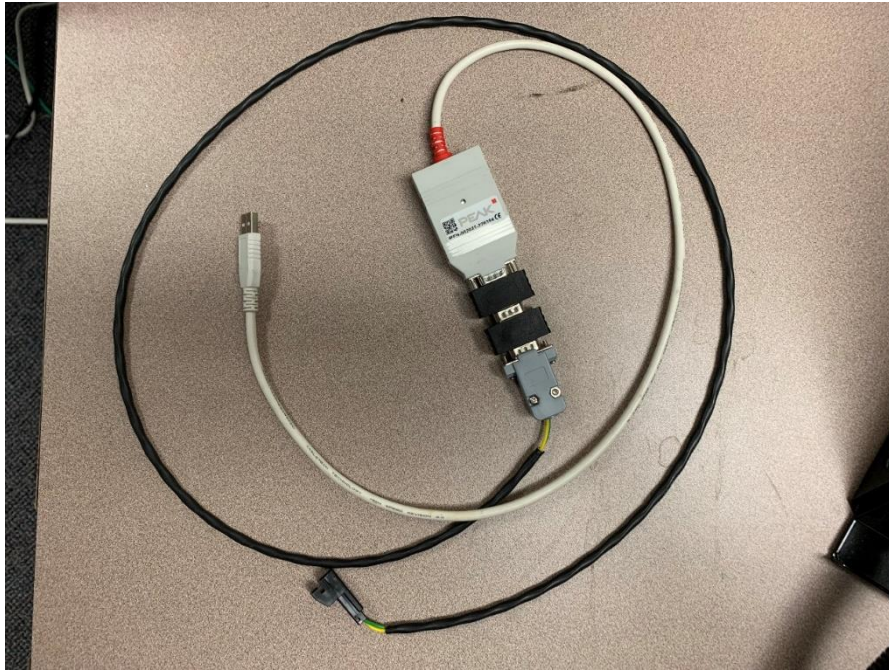


Run the executable file containing the tool. (Make sure the rest of the files shown in the below picture are in the same location as the tool)

Name	Date modified	Type	Size
AppSettings.ini	3/25/2020 9:32 PM	Configuration sett...	1 KB
Bergstrom UDS FieldCommissioningTool	6/21/2021 2:45 PM	Internet Shortcut	1 KB
FieldCommissioningTool.exe	3/8/2021 9:50 AM	Application	157 KB
PCAN_USB.dll	3/23/2020 9:11 PM	Application extens...	81 KB
SeedAndKey.dll	3/8/2021 9:50 AM	Application extens...	9 KB
Settings.cfg	9/3/2021 10:29 AM	CFG File	1 KB
UDSFlashLibrary.dll	3/8/2021 9:50 AM	Application extens...	2,053 KB
uninst.exe	6/21/2021 2:45 PM	Application	69 KB
VC_redist.x86.exe	10/7/2020 4:50 PM	Application	13,951 KB
vxlapl.dll	3/23/2020 9:11 PM	Application extens...	215 KB


The default configuration file should open as shown.

If another configuration file is required (provided by Bergstrom upon request):

Use file -> Load Configuration to open the correct configuration file. (The tool will default to this configuration file, the correct file must be loaded in every time the tool is re-opened)

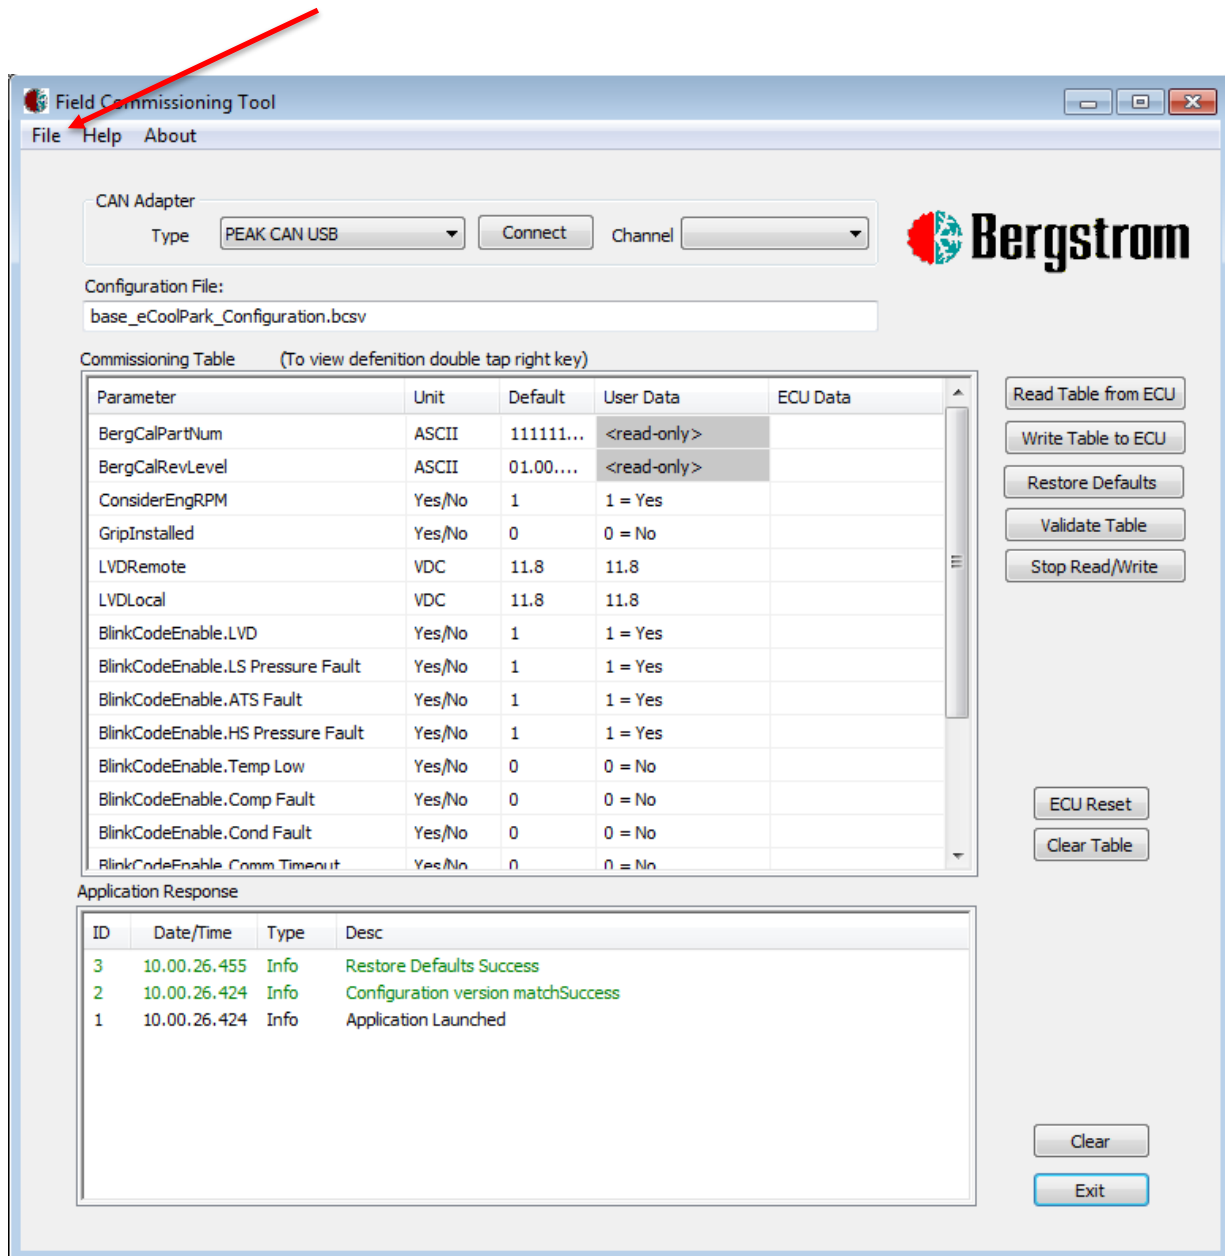

Make sure PEAK CAN USB is selected. Power on the eCoolPark system using the proper means for the vehicle (ex. rocker switch). Press “Connect” to connect to the Bergstrom ECU. The Application Response window should now display “Connect: Device Initialized” on top.

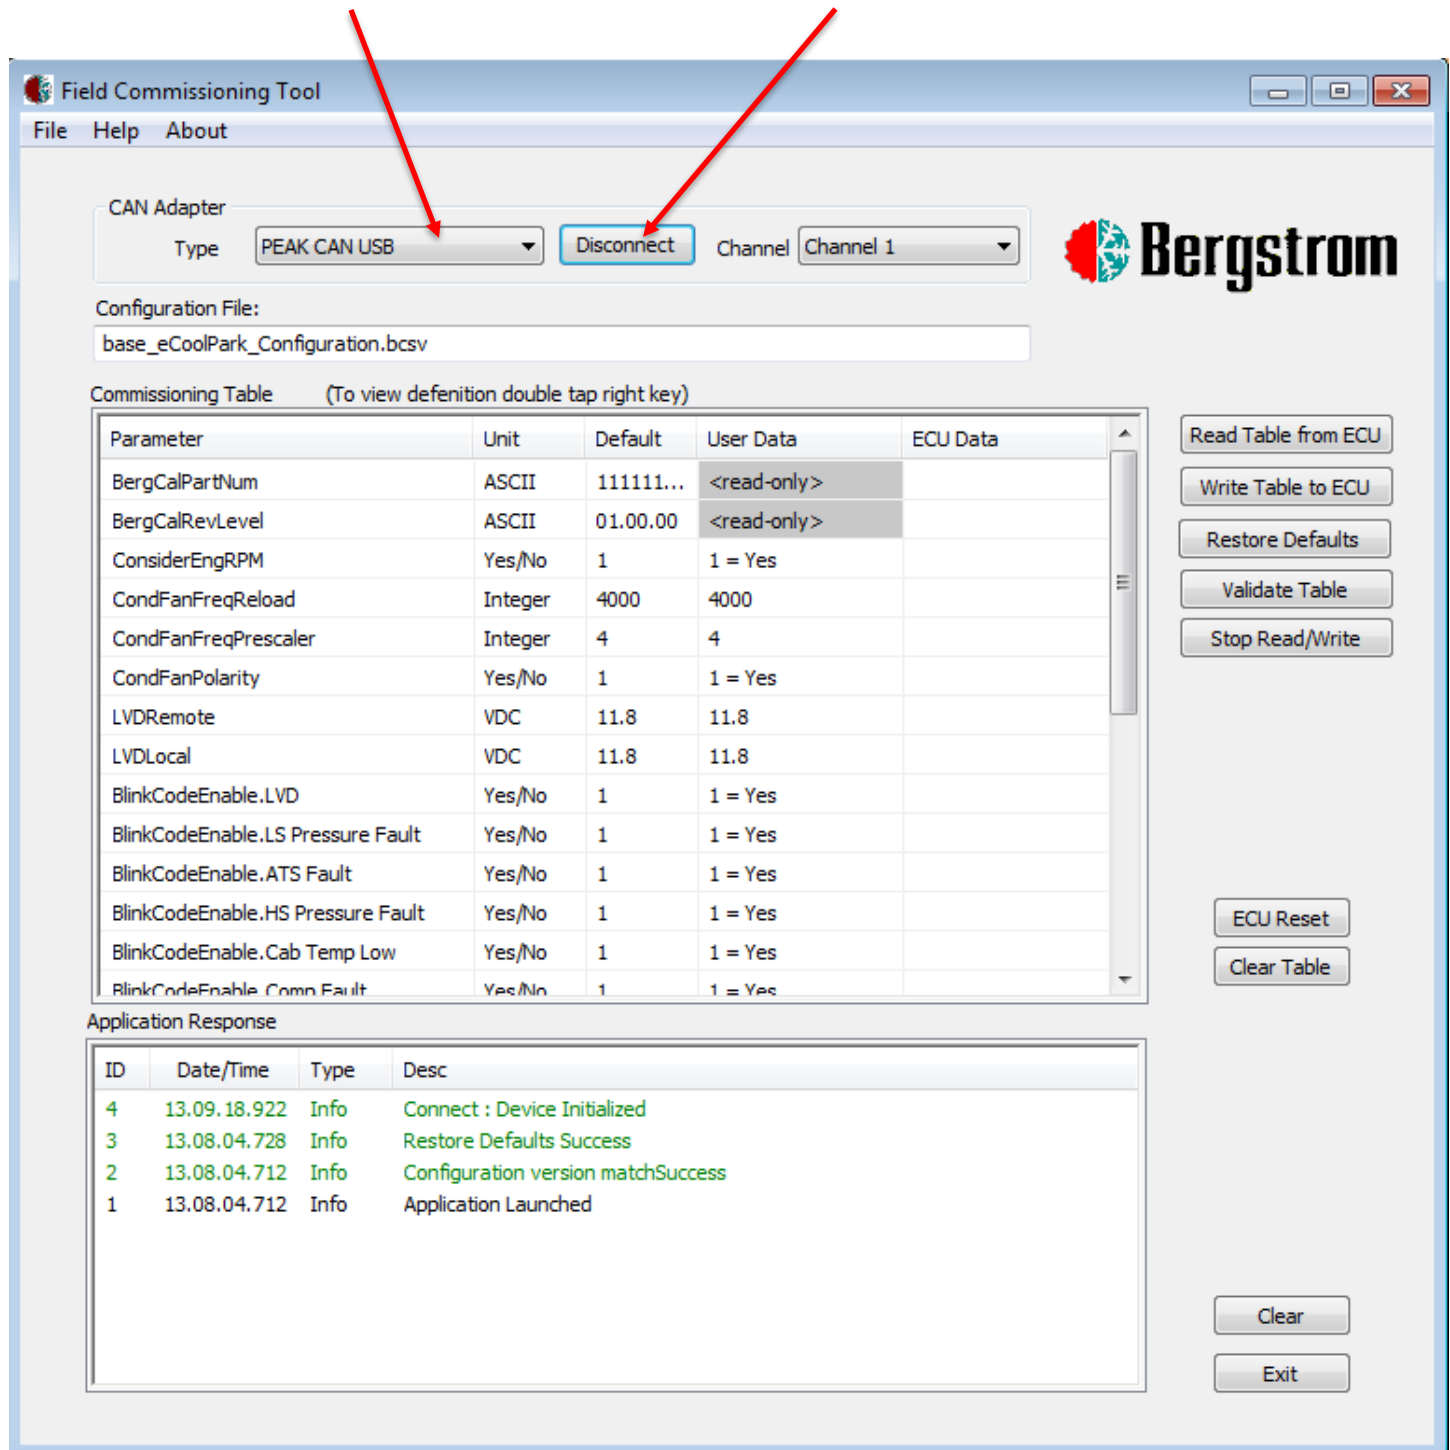

Field Commissioning Tool

File Help About

CAN Adapter
Type: **PEAK CAN USB** **Disconnect** Channel: **Channel 1**

Configuration File:
base_eCoolPark_Configuration.bcsv

Commissioning Table (To view definition double tap right key)

Parameter	Unit	Default	User Data	ECU Data
BergCalPartNum	ASCII	111111...	<read-only>	
BergCalRevLevel	ASCII	01.00.00	<read-only>	
ConsiderEngRPM	Yes/No	1	1 = Yes	
CondFanFreqReload	Integer	4000	4000	
CondFanFreqPrescaler	Integer	4	4	
CondFanPolarity	Yes/No	1	1 = Yes	
LVDRemote	VDC	11.8	11.8	
LVDLocal	VDC	11.8	11.8	
BlinkCodeEnable.LVD	Yes/No	1	1 = Yes	
BlinkCodeEnable.LS Pressure Fault	Yes/No	1	1 = Yes	
BlinkCodeEnable.ATS Fault	Yes/No	1	1 = Yes	
BlinkCodeEnable.HS Pressure Fault	Yes/No	1	1 = Yes	
BlinkCodeEnable.Cab Temp Low	Yes/No	1	1 = Yes	
BlinkCodeEnable.Comb Fault	Yes/No	1	1 = Yes	

Read Table from ECU
Write Table to ECU
Restore Defaults
Validate Table
Stop Read/Write


ECU Reset
Clear Table

Application Response

ID	Date/Time	Type	Desc
4	13.09.18.922	Info	Connect : Device Initialized
3	13.08.04.728	Info	Restore Defaults Success
2	13.08.04.712	Info	Configuration version matchSuccess
1	13.08.04.712	Info	Application Launched

Clear
Exit

Press “Read Table from ECU”. Let the tool update and wait until the Application window prompts “Reading completed”. Upon success, this will fill in green data in the ECU data column. This data represents the current state of the parameters on the ECU.

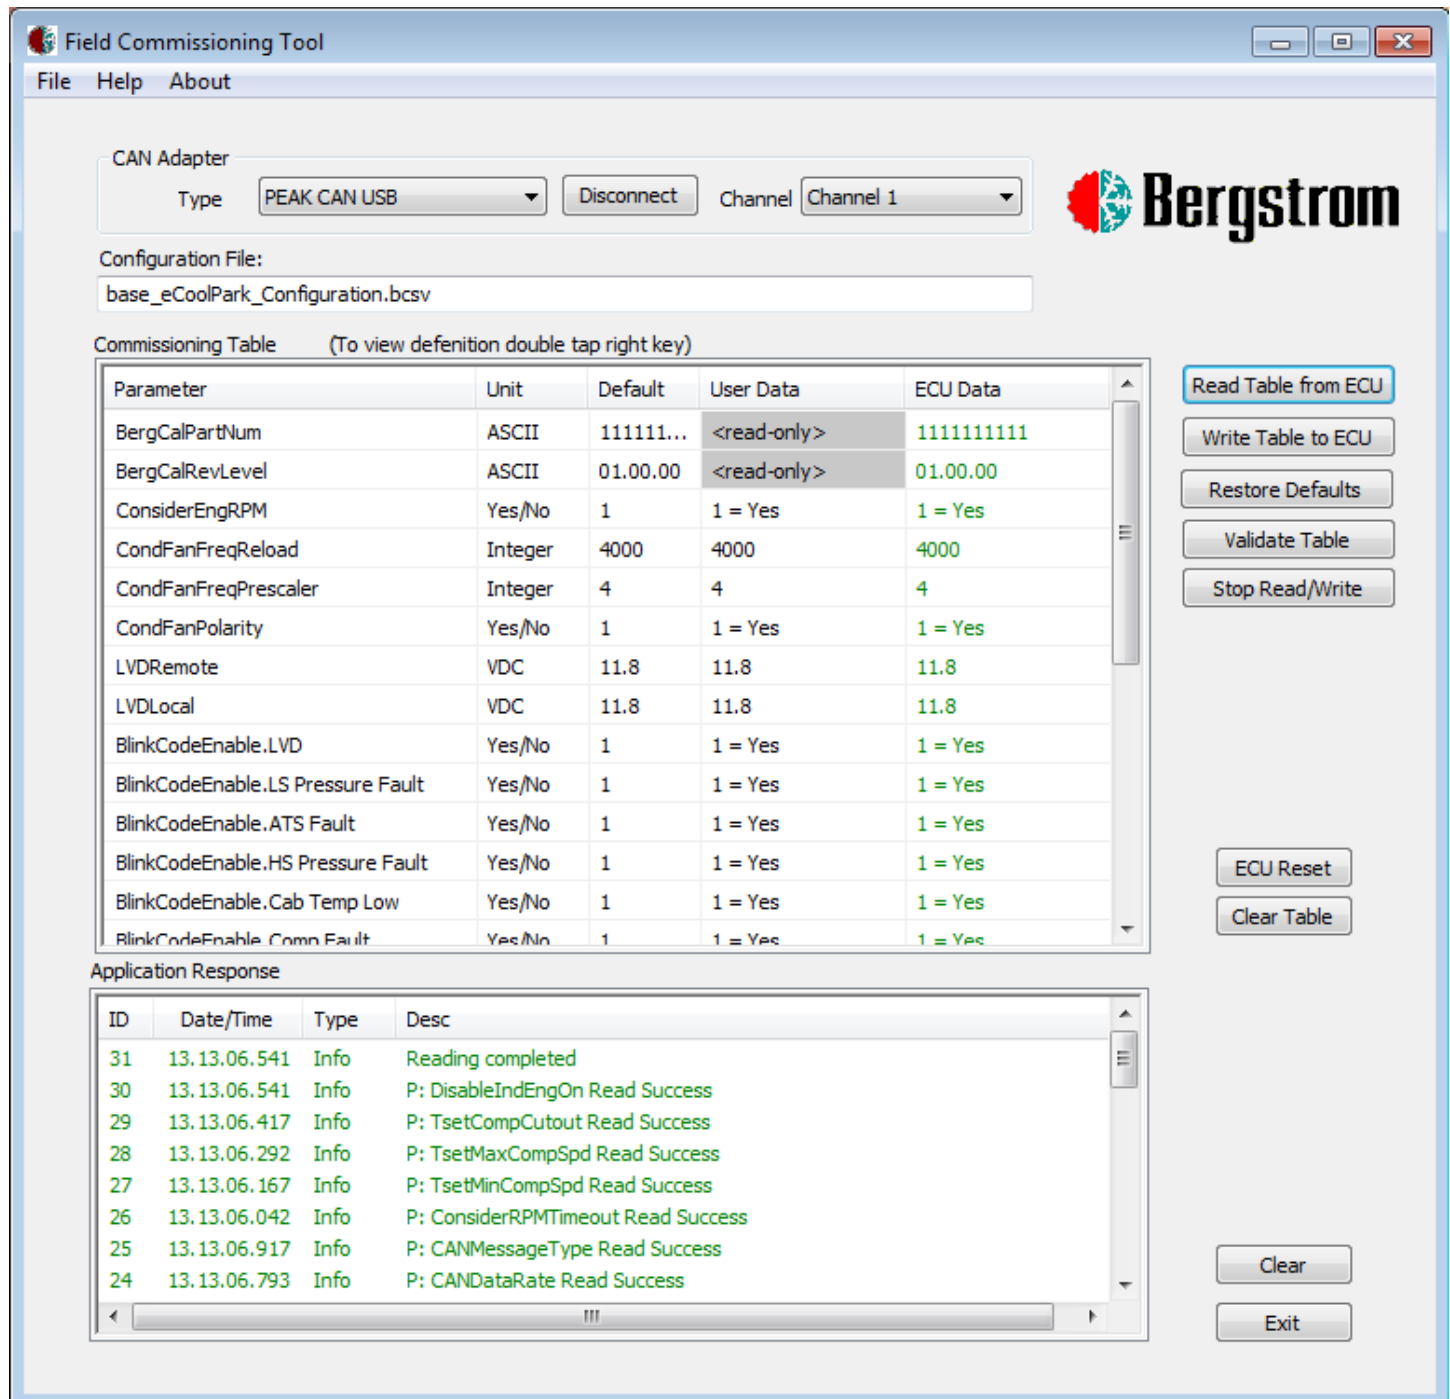

Field Commissioning Tool

File Help About

CAN Adapter
Type: **PEAK CAN USB** Disconnect Channel: **Channel 1**

Configuration File:
base_eCoolPark_Configuration.bcsv

Bergstrom

Commissioning Table (To view definition double tap right key)

Parameter	Unit	Default	User Data	ECU Data
BergCalPartNum	ASCII	111111...	<read-only>	1111111111
BergCalRevLevel	ASCII	01.00.00	<read-only>	01.00.00
ConsiderEngRPM	Yes/No	1	1 = Yes	1 = Yes
CondFanFreqReload	Integer	4000	4000	4000
CondFanFreqPrescaler	Integer	4	4	4
CondFanPolarity	Yes/No	1	1 = Yes	1 = Yes
LVDRemote	VDC	11.8	11.8	11.8
LVDLocal	VDC	11.8	11.8	11.8
BlinkCodeEnable.LVD	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.LS Pressure Fault	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.ATS Fault	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.HS Pressure Fault	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.Cab Temp Low	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.Comn Fault	Yes/No	1	1 = Yes	1 = Yes

Buttons: Read Table from ECU, Write Table to ECU, Restore Defaults, Validate Table, Stop Read/Write, ECU Reset, Clear Table

Application Response

ID	Date/Time	Type	Desc
31	13.13.06.541	Info	Reading completed
30	13.13.06.541	Info	P: DisableIndEngOn Read Success
29	13.13.06.417	Info	P: TsetCompCutout Read Success
28	13.13.06.292	Info	P: TsetMaxCompSpd Read Success
27	13.13.06.167	Info	P: TsetMinCompSpd Read Success
26	13.13.06.042	Info	P: ConsiderRPMTimeout Read Success
25	13.13.06.917	Info	P: CANMessageType Read Success
24	13.13.06.793	Info	P: CANDataRate Read Success

Buttons: Clear, Exit

To change a parameter: double click the parameter row in the “User Data” column. You can view the possible entries for the parameter and a description by double clicking the right key on the mouse (Do not need to change any parameters if using requested configuration file from Bergstrom).

Field Commissioning Tool

File Help About

CAN Adapter
 Type: **PEAK CAN USB** [Disconnect] Channel: **Channel 1**

Configuration File:
 base_eCoolPark_Configuration.bcsv

Commissioning Table (To view defenition double tap right key)

Parameter	Unit	Default	User Data	ECU Data
BergCalPartNum	ASCII	111111...	<read-only>	1111111111
BergCalRevLevel	ASCII	01.00.00	<read-only>	01.00.00
ConsiderEngRPM	Yes/No	1	1 = Yes	1 = Yes
CondFanFreqReload				
CondFanFreqPrescaler				
CondFanPolarity				
LVDRemote				
LVDLocal				
BlinkCodeEnable.LVD				
BlinkCodeEnable.LS Pressure Fault				
BlinkCodeEnable.ATS Fault				
BlinkCodeEnable.HS Pressure Fault				
BlinkCodeEnable.Cab Temp Low	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.Cmn Fault	Yes/No	1	1 = Yes	1 = Yes

FieldCommissioningTool

Parameter:
 ConsiderEngRPM
 Description:
 0=don't consider RPM, 1= consider RPM

OK

Read Table from ECU
 Write Table to ECU
 Restore Defaults
 Validate Table
 Stop Read/Write


ECU Reset
 Clear Table

Application Response

ID	Date/Time	Type	Desc
31	13.13.06.541	Info	Reading completed
30	13.13.06.541	Info	P: DisableIndEngOn Read Success
29	13.13.06.417	Info	P: TsetCompCutout Read Success
28	13.13.06.292	Info	P: TsetMaxCompSpd Read Success
27	13.13.06.167	Info	P: TsetMinCompSpd Read Success
26	13.13.06.042	Info	P: ConsiderRPMTimeout Read Success
25	13.13.06.917	Info	P: CANMessageType Read Success
24	13.13.06.793	Info	P: CANDataRate Read Success

Clear
 Exit

Click “Validate Table” to verify all the entries made are valid. Upon success, click “Write Table to ECU”. Let the tool update and wait for the Application window to prompt “Writing Data completed”. Upon success, the ECU parameters have been updated. **Cycle power to the system to complete the process.**

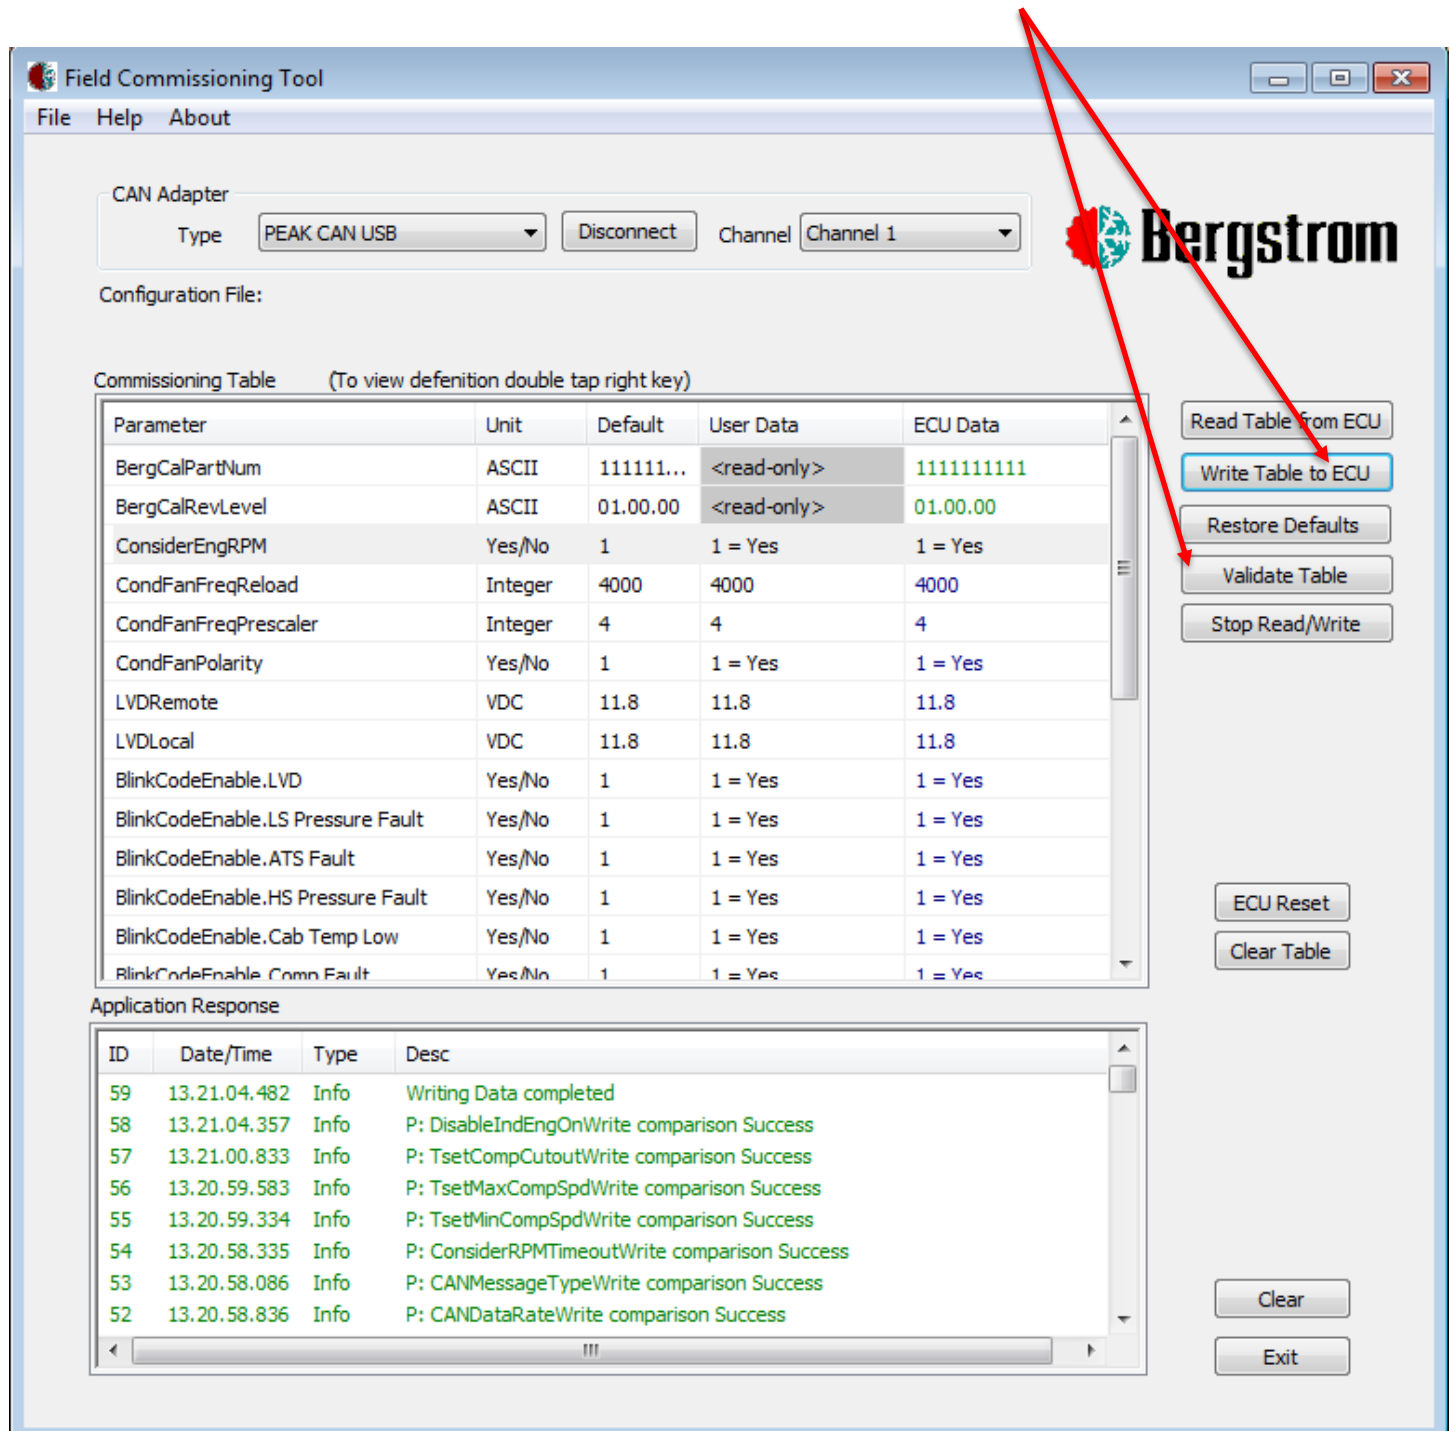

The screenshot shows the 'Field Commissioning Tool' window. At the top, there's a menu bar with 'File', 'Help', and 'About'. Below it, the 'CAN Adapter' section shows 'Type' as 'PEAK CAN USB' and 'Channel' as 'Channel 1'. A 'Disconnect' button is also present. The 'Configuration File:' field is empty. The 'Commissioning Table' section has a subtitle '(To view definition double tap right key)'. It contains a table with 5 columns: Parameter, Unit, Default, User Data, and ECU Data. The table lists various parameters like BergCalPartNum, BergCalRevLevel, ConsiderEngRPM, etc. To the right of the table are buttons: 'Read Table from ECU', 'Write Table to ECU' (highlighted with a red arrow), 'Restore Defaults', 'Validate Table', and 'Stop Read/Write'. Below the table is the 'Application Response' section, which shows a log of events with columns ID, Date/Time, Type, and Desc. The log shows several successful writes. At the bottom right, there are buttons for 'ECU Reset', 'Clear Table', 'Clear', and 'Exit'.

Commissioning Table (To view definition double tap right key)

Parameter	Unit	Default	User Data	ECU Data
BergCalPartNum	ASCII	111111...	<read-only>	1111111111
BergCalRevLevel	ASCII	01.00.00	<read-only>	01.00.00
ConsiderEngRPM	Yes/No	1	1 = Yes	1 = Yes
CondFanFreqReload	Integer	4000	4000	4000
CondFanFreqPrescaler	Integer	4	4	4
CondFanPolarity	Yes/No	1	1 = Yes	1 = Yes
LVDRemote	VDC	11.8	11.8	11.8
LVDLocal	VDC	11.8	11.8	11.8
BlinkCodeEnable.LVD	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.LS Pressure Fault	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.ATS Fault	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.HS Pressure Fault	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.Cab Temp Low	Yes/No	1	1 = Yes	1 = Yes
BlinkCodeEnable.Comn Fault	Yes/No	1	1 = Yes	1 = Yes

Application Response

ID	Date/Time	Type	Desc
59	13.21.04.482	Info	Writing Data completed
58	13.21.04.357	Info	P: DisableIndEngOnWrite comparison Success
57	13.21.00.833	Info	P: TsetCompCutoutWrite comparison Success
56	13.20.59.583	Info	P: TsetMaxCompSpdWrite comparison Success
55	13.20.59.334	Info	P: TsetMinCompSpdWrite comparison Success
54	13.20.58.335	Info	P: ConsiderRPMTimeoutWrite comparison Success
53	13.20.58.086	Info	P: CANMessageTypeWrite comparison Success
52	13.20.58.836	Info	P: CANDataRateWrite comparison Success

Field Configuration Parameter Settings per System Setup

If without requested configuration file:

If the vehicle has any of the following, the configuration parameters must be altered as described below.

Vehicle has external Bergstrom enable (ex. Auto stop/start OR Miller EnCab System):

ConsiderEngRPM – “0 = No”

ConsiderRPMTIMEOUT – “0 = No”

BlinkCodeEnable.Comm Timeout – “0 = No”

Vehicle has “Standard ID” CAN messaging (default is “1 = Extended ID”):

CANMessageType – “0 = Standard ID”

Vehicle CAN has 250k or 1M baud rate (default is “1 = 500K”):

CANDataRate – “0 = 250K” OR “2 = 1M”

If user does not want indicator light illuminated during vehicle engine ON (only if switch is left in ON position):

DisableIndEngOn – “1 = Disable indicator Light when engine is on”

Testing eCoolPark Normal Operation:

1. Set the parking brake and turn the engine off – unit will only run if engine RPM is 0
2. Turn the key to the ignition ON position (do not start engine)
3. Set OEM control panel to: medium blower speed, recirculation, panel mode, and max cool. These initial settings will maximize system performance
4. Push the eCoolPark rocker switch to the ON position
5. Unit will run until any of the following conditions are met (default configurable parameters shown)
 - a. Rocker switch is turned off
 - b. Battery voltage drops below LVD (11.8 VDC for 12 V eCoolPark system)
 - i. Restart at 12.5 VDC
 - c. Cab air temperature sensor drops below 68 deg F (adjustable parameter)
 - i. Restart at 70 deg F
 - d. High side pressure goes above 275 psi
 - i. Restart after 30 seconds, condenser fan will stay on
 - e. Low side pressure drops below 20 psi
 - i. Restart at 35 psi, condenser fan will stay on

Normal Operation:

- Indicator light solid green
- Compressor running
- Condenser fan running (or cycling)
- OE evaporator blower running
- Cold air coming from louvers in cab



If normal operation is not achieved consult the troubleshooting section. Specifically, if the indicator light is blinking there is a fault in the system. Consult the fault code table in the troubleshooting section.

Breakdown of eCoolPark Logic:

1. ECU Operation – will verify proper conditions are set before running compressor/condenser
 - a. Battery voltage
 - b. Engine RPM
 - c. Cab air temperature range
 - d. Low pressure transducer range
 - e. High pressure transducer range
2. Compressor Operation
 - a. Cab air temp sensor – primary sensor to drive compressor
 - i. Will ramp compressor based off cab temperatures
 - ii. Once below cutout, a 2-degree F hysteresis is required before compressor enables again
 - iii. High pressure transducer high cutout is 275 psi
 - b. Low side pressure transducer – secondary sensor to drive compressor (will be primary if air temp sensor is disconnected or miss-wired)
 - i. Ramps compressor between 30 and 40 psi
 - ii. Low cutout is at 20 psi, compressor will restart at 35 psi

Note: Any time the compressor shuts off there is a minimum 30 seconds before compressor will restart unless power is cycled.

3. Condenser Operation
 - a. High side transducer – primary sensor to drive condenser
 - i. Will ramp condenser based on high side pressure
 - ii. Different ramping schemed based on which fan is in system
 - iii. High pressure transducer low cutout is at 100 psi. Startup at 105 psi.
 - b. Low side pressure transducer – secondary sensor to drive condenser (primary if fault in high side)
 - i. Ramps condenser from 30 to 55 psi
 - ii. Low pressure transducer low startup is at 35 psi

Section 4

Troubleshooting

eCoolPark 1.0 12V

Ford Explorer

Installation Manual



If the eCoolPark unit won't run the following steps should be performed to check the wiring.

1. Start with the ignition harness and ensure power is being transmitted from the ignition harness into the main vehicle harness (from start battery add-a-fuse) – all steps should result in a reading of 12V.
 - a. Check battery voltage on ignition harness relay across orange (pin 1) and black (pin 2).
 - i. Possible Cause: add-a-fuse is not installed correctly or system control ground is not connected to battery negative.
 - b. If auto stop/start installed or there is an external enable, check battery voltage on ignition harness relay across purple (pin 5) and black (pin 2).
 - i. Possible Cause: auto stop/start or external enable is not sending 12 V signal or system control ground is not connected to battery negative.
 - c. If no auto stop/start or external enable, check battery voltage on ignition harness rocker switch across red (pin 3) and black (pin 7) – with rocker switch connected and latched to ON position.
 - i. Possible Cause: wiring issue or failed rocker switch.
 - d. Check battery voltage on the 6-way Deutsch connector across red (pin 1) and black (pin 5). This must be back probed while the ignition harness 6-way is mated to the main vehicle harness connector.
 - i. Possible Cause: wiring issue.
2. Check the voltages at the unit by removing the connectors from the unit and probing directly into the connectors
 - a. Check for battery voltage on round Deutsch connector across red (pin 1) and black (pin 4).
 - i. Possible Cause: wiring issue.
 - b. Check for battery voltage on round Deutsch connector across red (pin 3) and black (pin 4).

Possible Cause: power wires disconnected from battery or wiring issue.



If the unit still won't run after the previous step has been completed, it will be necessary to connect to the system over the CAN-bus.


To connect to the system CAN-bus you will need the following:

- Laptop
 - BUSMASTER installed – <https://rbei-etas.github.io/busmaster/>
 - PCAN-USB Drivers – <https://www.peak-system.com/>
- Peak PCAN-USB with termination resistors
- CAN service jumper – purchased from Bergstrom Inc.
- System power


Complete the following:

1. Connect the CAN service jumper in-between the ignition harness and the main vehicle harness
2. Connect the Peak PCAN to the service jumper and laptop
3. Open Busmaster
4. Close trace window
5. Select load
6. Select “no” on dialog window
7. Locate correct configuration file and open
8. In the ribbon, select “Driver Selection” and make sure “Peak USB” is selected
9. In the ribbon, select “Database” select “Associate”
10. Locate correct database file and open.
11. Open Signal Watch and Transmit Window
12. Signal watch will tell you everything the eCoolPark unit is monitoring and outputting
13. Use transmit window to test override of compressor and condenser

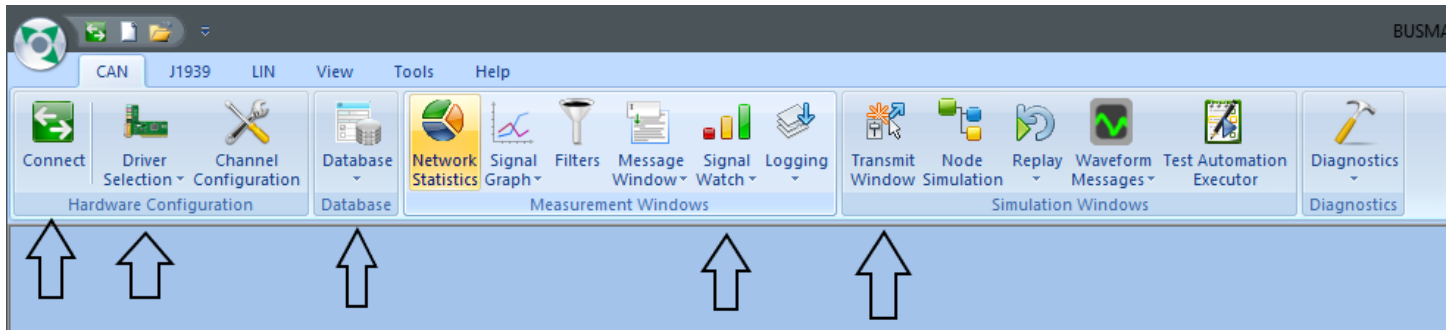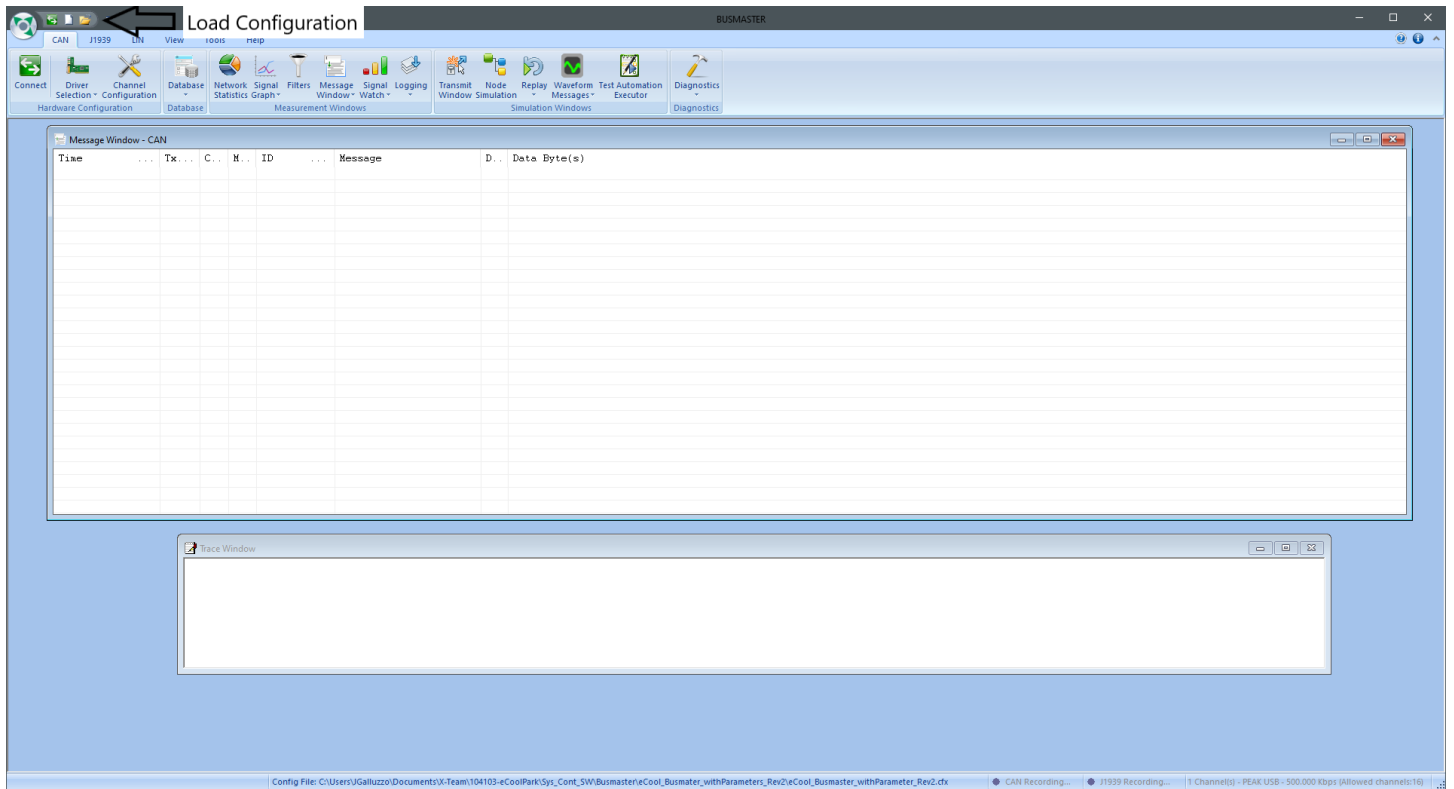

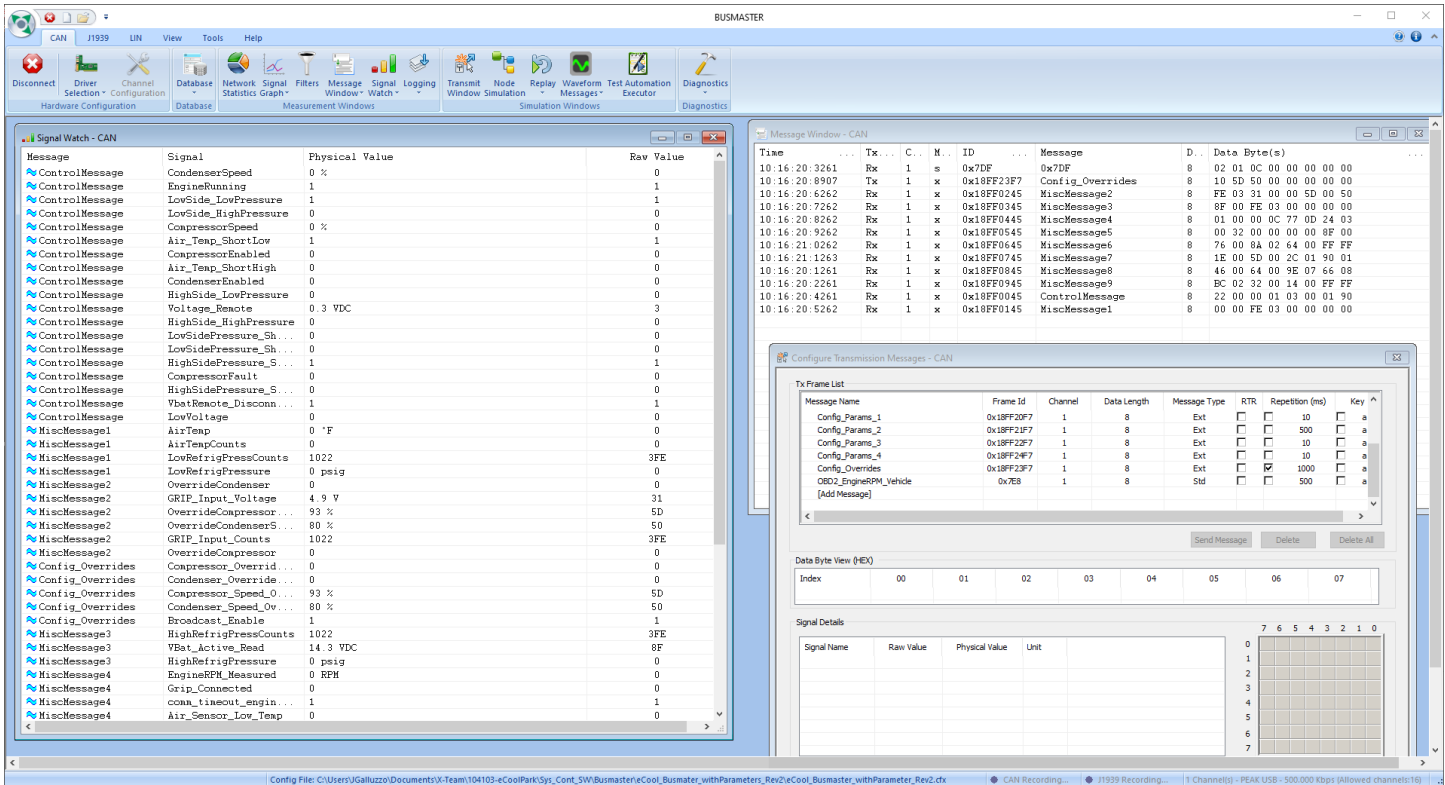

- Find the Config_Overrides row, select checkbox under “Repetition” column
- Under Signal Details, column “Physical Value”, change the corresponding row to a 1 to enable the compressor or condenser

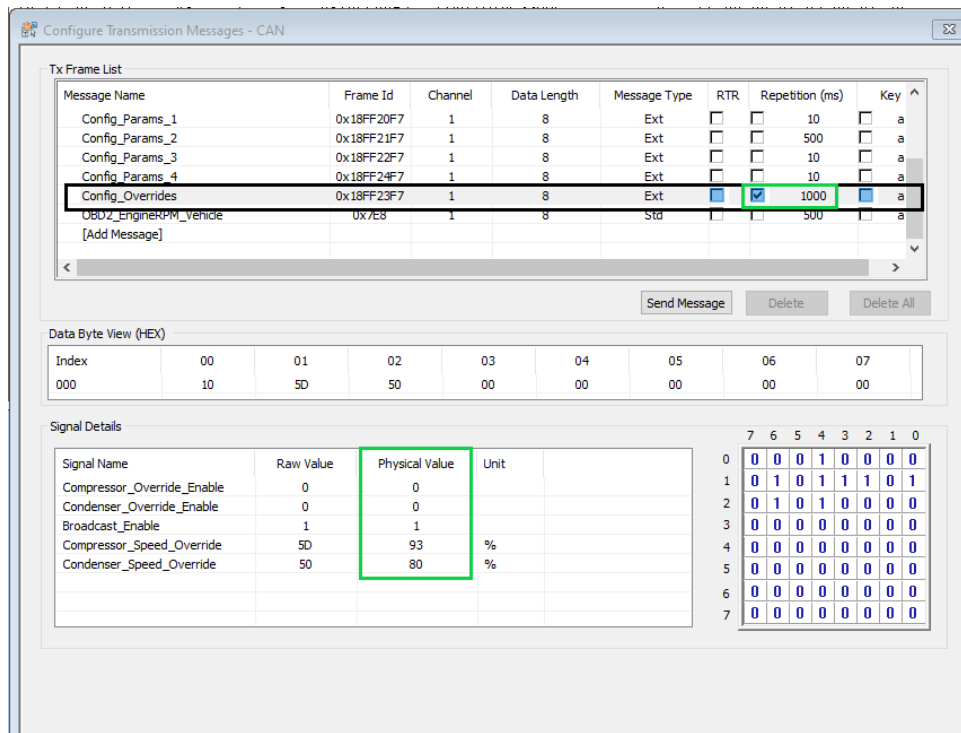

Fault Code List – Blinks on **Green** Indicator Light:

Code	Failure	Description
None	No faults – light solid green	System operation normal
1	LVD	Low Voltage Battery voltage fell below set low voltage disconnect parameter
2	Low Side Pressure Short Low/High Fault	Low side pressure fell below set LS low cutoff (default: 20 psi) Low side pressure rose above set LS high cutoff
3	Air Temp Sensor Short Low/High Fault	
4	High Side Pressure Short Low/High Fault	High side pressure rose above set HS high cutoff (default: 275 psi) High side pressure fell below set HS low cutoff
5	Air Temperature Too Cold Status	Temperature in Cabin too low for A/C
6	Compressor Fault	Compressor malfunction
7	Condenser Fault	Condenser malfunction
8	Engine Speed Timeout	Lost connection to CAN Vehicle engine speed not reading
9	Ambient Temp Too Low	Ambient temperature too low
10	Compressor Lockout	Compressor seized Possible compressor failure

NITE Technical Service Line: 1-866-204-8570

Section 5

Appendix






eCoolPark 1.0 12V


Ford Explorer

Installation Manual



GRAPHIC	PART NUMBER	DESCRIPTION	N-m	In-lb	Ft-lb
	610099	Nut – Lock, 8mm	2.3±0.23	20±2	1.67±0.16
	621490	Nut – Keps, #10-32	2.3±0.23	20±2	1.67±0.16
	1001239680	Screw - #10-32 x 1/2" Machine	2.3±0.23	20±2	1.67±0.16
	1001520264	Nut – M5 x 0.8 Belleville	2.3±0.23	20±2	1.67±0.16
	1002522057	Screw - #10-14 x 1/2" Tri-Lobe	2.3±0.23	20±2	1.67±0.16
	1000341855	Nut – 1/4-28 Serrated Hex Flange	3.4±0.34	30±3	2.5±0.25
	1001433139	Screw - #10-32 Hex Sems Conical Washer	3.4±0.34	30±3	2.5±0.25
	1001519699	Nut – M6 x 1 Belleville	7.0±0.7	62±6	5.17±0.5
	1002032563	Transducer, Pressure – Low Side	7.0±0.7	62±6	5.17±0.5

GRAPHIC	PART NUMBER	DESCRIPTION	N-m	In-lb	Ft-lb
	1002076692	Screw – Soc Hd Cap Screw M6-1.0x16 SS	7.0±0.7	62±6	5.17±0.5
	1002160852	Transducer, Pressure – High Side	7.0±0.7	62±6	5.17±0.5
	1002410443	Check Valve, Refrigerant – Schrader Core	0.45±0.045	4±1	0.33±0.08
	1002248234	Connector, Electrical – Hex Nut	5.6±0.5	50±5	4.17±0.42
	1002660607	M8 Bolt	21	186	15.5 ± 1



CERTIFICATE

of Training

THIS CERTIFICATE IS PROUDLY PRESENTED
FOR BECOMING AN INTEGRATOR

COMPANY NAME

CITY, STATE

for completing the necessary training on the installation, operation and
service of an eCoolPark, thereby becoming an eCoolPark System Integrator

DATE

SIGNATURE